




Wiring

The wiring diagram depicts all the wiring connections required for proper operation of the unit.

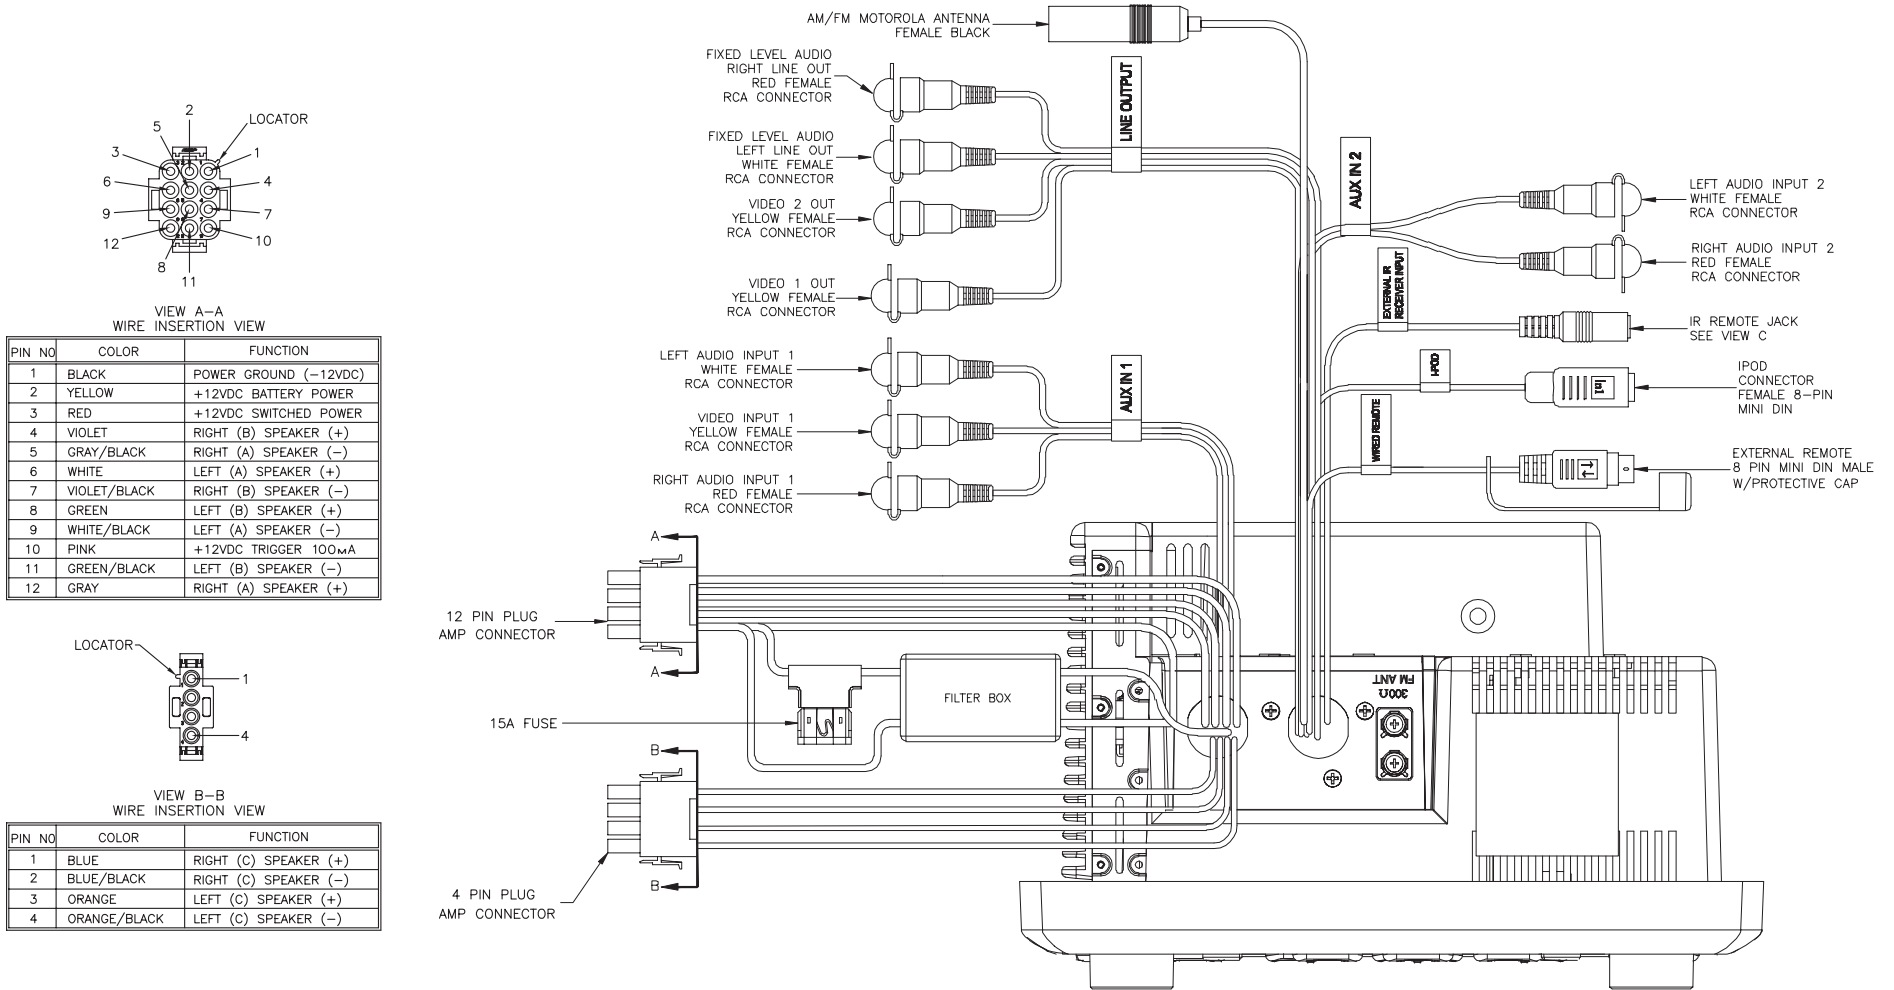

VIEW A-A
WIRE INSERTION VIEW

PIN NO	COLOR	FUNCTION
1	BLACK	POWER GROUND (-12VDC)
2	YELLOW	+12VDC BATTERY POWER
3	RED	+12VDC SWITCHED POWER
4	VIOLET	RIGHT (B) SPEAKER (+)
5	GRAY/BLACK	RIGHT (A) SPEAKER (-)
6	WHITE	LEFT (A) SPEAKER (+)
7	VIOLET/BLACK	RIGHT (B) SPEAKER (-)
8	GREEN	LEFT (B) SPEAKER (+)
9	WHITE/BLACK	LEFT (A) SPEAKER (-)
10	PINK	+12VDC TRIGGER 100mA
11	GREEN/BLACK	LEFT (B) SPEAKER (-)
12	GRAY	RIGHT (A) SPEAKER (+)



VIEW B-B
WIRE INSERTION VIEW

PIN NO	COLOR	FUNCTION
1	BLUE	RIGHT (C) SPEAKER (+)
2	BLUE/BLACK	RIGHT (C) SPEAKER (-)
3	ORANGE	LEFT (C) SPEAKER (+)
4	ORANGE/BLACK	LEFT (C) SPEAKER (-)