



# FURRION

2021 Master Catalog

## We Design Products That Inspire You To Explore Life.

Behind every Furrion product is a story of transformation, and through a decade of innovation we challenged the status quo to redefine luxury mobile living. Now we create immersive digital experiences through home entertainment, design appliances that inspire culinary creativity, and power a new generation of off-grid, sustainable living. In your home, vehicle, yacht and beyond.

• Our Locations



## **Our Philosophy.**

We have a vision for how life could be. Everything we design exists to bring us closer to a smarter, more sustainable future, faster.

## **We Challenge the Elements.**

Inspired by wind, terrain, water and sun, we are motivated to deliver experiences to the adventurous who roam the world and ride to the edge of possibility.





## The Art of Design.

Since 2010 we have advanced the goals of our customers by co-creating the future of electric mobility, off-grid ecosystems, compact living, luxury hotels, yachting and more.



**Limitless™**

## The Connected Journey.

Limitless is a 5th wheel like no other. It features 6 slide outs expanding to 350 square feet of smart living space.



**Adonis**

## Technology in Motion.

We built an entirely new experience on water with innovation that underlines the opulence and style of yachting.

**Elysium™**

## The Ultimate Luxury.

Furrion Design created a concept RV that connects you with intelligent technologies in luxurious comfort. Elysium is 45' long, 8' wide, 13' 6" high and is a fully operational luxury home on wheels.



# Contents.

## Electronics

### AV Entertainment

TV's	16-17
Stereos	18-22
Speakers, Soundbars & Subwoofers	23-25
Bluetooth Speakers	26-29

## Appliances

### Cooking

Ranges	46-49
Cooktops	50-53
Ovens	54-57
Microwaves	58-59
Grills	60-63

## Energy

### Off-Grid Energy

Solar Panels	92-97
--------------	-------

## Furrion Product List

AV Entertainment	110
Navigation & Network	111

## Navigation

Cameras	30-35
---------	-------

## Network

Antennas and Routers	36-39
----------------------	-------

## Refrigeration

Refrigerators	64-73
---------------	-------

## Comfort

Air Conditioning	74-79
Electric Fireplaces	80-83
Water Heater	84-87

## Power Distribution

AC/DC Power Centers	98
Inverters & Converters	99
Cordsets & Adapters	100-105
Power Inlets	106-107
Connectors & Adapters	108-109

## Appliances & Comfort

112-113
---------

## Power Distribution & Energy

114-115
---------



## Electronics

### AV Entertainment

#### TV's

16-17

#### Stereos

18-22

#### Speakers, Soundbars & Subwoofers

23-25

#### Bluetooth Speakers

26-29

### Navigation

#### Cameras

30-35

### Network

#### Antenna and Routers

36-39



## **Engineered to Elevate Life.**

Furrion electronics offer unparalleled levels of technology designed specifically for luxury living. From TV's to speakers, cameras and connectivity, Furrion has all your AV needs covered.



FDHK32V1A 32" Furrion Sense® HD LED All-In-One Entertainment System



Max. Resolution	1366 x 768	Power Supply	12V DC
Audio	2 x 40W (Max) 2 zones	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 400 x 200mm
Product Dimension (TV without Stand)	29 x 21.81 x 4.25" (736.7 x 554 x 107.7mm)	Net Weight (lbs/kg)	14lbs / 6.35kg
<b>Tuner/broadcasting</b>			
Analog	NTSC	Digital	ATSC
<b>Connections</b>			
No. of HDMI Inputs	3	No. of Composite AV Inputs	1
No. of Component (YPbPr) Inputs	1	No. of USB Inputs	1
No. of Antenna (RF) Inputs	1	No. of USB Power Output (1A)	1
No. of Optical Audio Output	1		
<b>Soundbar</b>			
Support media format	MP3 / JPEG	AUX-IN support	✓
Tuner Type	AM / FM	IR Control Jack	✓
Bluetooth	Class 1 v4.2		

FDHS32M4A 32" HD LED TV



Max. Resolution	1366 x 768	Power Supply	100-240V AC
Audio	2 x 10W (Max)	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 200 x 100mm
Product Dimension (TV without Stand)	29 x 17.6 x 3" (735 x 447 x 74mm)		
<b>Tuner/broadcasting</b>			
Analog	NTSC	Digital	ATSC
<b>Connections</b>			
No. of HDMI Inputs	3	No. of USB Inputs	1
No. of Antenna (RF) Inputs	1	No. of Optical Audio Outputs	1
No. of Composite AV Inputs	1		

\*Features and specifications that do not affect product performance are subject to change without notice

FDFS40M4A 40" FHD LED TV



Max. Resolution	1920 x 1080	Power Supply	100-240V AC
Audio	2 x 10W (Max)	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 200 x 200mm
Product Dimension (TV without Stand)	35.69 x 22.63 x 8.19" (906.5 x 520.7 x 79.5mm)		
<b>Tuner/broadcasting</b>			
Analog	NTSC	Digital	ATSC
<b>Connections</b>			
No. of HDMI Inputs	3	No. of USB Inputs	1
No. of Component (YPbPr) Inputs	1	No. of 3.5mm Headphone Outputs	1
No. of Antenna (RF) Inputs	1	No. of Optical Audio Outputs 1	1
No. of Audio L/R Outputs	1		

FDUS50F1A 50" 4K LED TV



Max. Resolution	3840 x 2160	Power Supply	100-240V AC
Audio	2 x 8W (Max)	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 200 x 200mm
Product Dimension (TV without Stand)	44.2 x 25.5 x 3.3" (1121.7 x 646.6 x 82.6mm)		
<b>Tuner/broadcasting</b>			
Analog	NTSC	Digital	ATSC
<b>Connections</b>			
No. of HDMI Inputs	3	No. of USB Inputs	1
No. of Component (YPbPr) Inputs	1	No. of 3.5mm Headphone Outputs	1
No. of Antenna (RF) Inputs	1	No. of Optical Audio Outputs 1	1
No. of Audio L/R Outputs	1		

FDUS50M7A 50" 4K LED TV



Max. Resolution	3840 x 2160	Power Supply	100-240V AC
Audio	2 x 8W	Viewing Range	178° / 178°
Remote	Unismart™ remote	Wall Mounting	Vesa 200 x 200mm
Product Dimension (TV without Stand)	44.3 x 25.8 x 2.5" (1126x653x62mm)		
<b>Tuner/broadcasting</b>			
Analog	NTSC	Digital	ATSC
<b>Connections</b>			
No. of HDMI Inputs	3	No. of Component (YPbPr) Inputs	1
No. of Antenna (RF) Inputs	1	No. of USB Inputs	1
No. of Composite AV Inputs	1	No. of Optical SPDIF Outputs	1













# Feature Product



## Stereos

# 3-Zone Entertainment System with DVD.

The DV1230 series boasts 260 Watts of power, independent speaker outputs and a built-in DVD player to provide the ultimate all-in-one stereo system. With a variety of connectivity and playback options, including USB, AUX-IN, HDMI-IN, optical and coaxial audio with video support, it offers the next generation of multi-room entertainment.

-  VIBRATIONSMART™
-  CLIMATESMART™
-  SIGNALSMART™
-  HDMI FRONT ACCESS
-  SUBWOOFER OUT
-  USB INTERFACE
-  HEADPHONE JACK
-  AUXILIARY IN
-  2-ZONE INDEPENDENT CONTROL
-  AUDIO CONTROL WHEEL
-  WORKS WITH UNIMOTE
-  APP CONTROL



Optimized to add powerful bass tones and explosive performance, with a built-in DVD player, to your stereo experience on the road.



The ultimate all-in-one stereo system, boasting 3-Zone audio and 2-Zone independent controls.



Built to withstand constant vibrations and extreme climates thanks to Vibrationsmart™ and Climatesmart™ Technology.

DV1230 260W 3-Zone Entertainment System with Independent Zone Control and DVD



Audio	4 x 50W + 2 x 30W (Max)	Zones	3-zone
Power Supply	12V DC	Supported Media Format	MP3 / WMA / MP4
Bluetooth®	4.0	Product Dimension (W x H x D)	9.8 x 4.7 x 7.1" (248.6 x 118.3 x 108.1mm)

**Connections**

No. of RCA (Audio L/R) Inputs, Rear Panel	2	No. of AUX-In, Front panel	1
No. of Video Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	1
No. of Subwoofer Outputs, Rear Panel	1	No. of Video Outputs, Rear Panel	1
No. of Optical Audio Inputs, Rear Panel	1	No. of HDMI Outputs, Rear Panel	1
No. of HDMI Inputs, Front panel	1	No. of Coaxial Audio Inputs, Rear Panel	1
No. of USB Inputs, Front panel	1		

DV3100S 120W 2-Zone Entertainment System with DVD



Product Dimension (W x H x D)	10 x 5.75 x 10" (253 x 146 x 253mm)
-------------------------------	--

**Connections**

No. of RCA (Audio L/R) Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	2
No. of Video Outputs, Rear Panel	2	No. of Subwoofer Outputs, Rear Panel	1
No. of HDMI Inputs, Front Panel	1	No. of IR Control Jack	1
No. of AUX-in, Front panel	1	No. of USB Inputs, Front panel	1

DV3300S 120W 2-Zone Entertainment System with DVD



Audio	4 x 30W (Max)	Zones	2-zone
Power Supply	12V DC	Supported Media Format	MP3 / WMA / MP4 / AVI
Bluetooth®	4.0	Product Dimension (W x H x D)	7.9 x 4.4 x 7.9" (200 x 110 x 198.9mm)

**Connections**

No. of RCA (Audio L/R) Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	1
No. of Video Outputs, Rear Panel	1	No. of Subwoofer Outputs, Rear Panel	1
No. of HDMI Outputs, Rear Panel	1	No. of IR Control Jack	1
No. of Video Supported AUX In, Front Panel	1	No. of USB Inputs, Front panel	1
No. of AUX-in, Front panel	1		

DV7200 40W 2-Zone Mono Entertainment System



Audio	4 x 10W (Max)	Zones	2-zone
Power Supply	12V DC	Supported Media Format	MP3 / WMA
Bluetooth®	4.0	Product Dimension (W x H x D)	5.1 x 4.5 x 3.4" (129.8 x 112.9 x 85.3mm)

**Connections**

No. of RCA (Audio L/R) Inputs, Rear Panel	2	No. of AUX-in, Front panel	1
No. of Video Inputs, Rear Panel	1	No. of RCA (Audio L/R) Outputs, Rear Panel	1
No. of Subwoofer Outputs, Rear Panel	1	No. of Video Outputs, Rear Panel	1
No. of HDMI Inputs, Front panel	1	No. of HDMI Outputs, Rear Panel	1
No. of USB Inputs, Front panel	1		

\*Features and specifications that do not affect product performance are subject to change without notice

FSBN4W-BL Soundbar Speaker



Max Power	20W
Impedance	4Ω@1kHz 1V
Effective Frequency Band	Fo-20kHz
Resonance Frequency	100 ± 20% Hz
Output Sound Pressure Level	85dB
Product Dimension (W x H x D)	19.94 x 12.25 x 15.56" (506 x 310 x 395mm)
Net Weight (lbs/kg)	15.84lbs / 7.2kg



FSBT43S Soundbar Speaker



Max Power	30W
Impedance	4Ω @1kHz 1V
Effective Frequency Band	Fo-20kHz
Resonance Frequency	80 ± 20%Hz
Output Sound Pressure Level	88 ± 3dB
Product Dimension (W x H x D)	8.1 x 4.7 x 2.4" (203.4 x 118.4 x 59.7mm)
Net Weight (lbs/kg)	3.5lbs / 1.6kg



FSB24SA2C Passive Soundbar



Max Power	40W
Impedance	4Ω @1kHz 1V
Effective Frequency Band	Fo-18kHz
Resonance Frequency	150±20%Hz
Output Sound Pressure Level	89±3dB @1W/m
Product Dimension (W x H x D)	29.6 x 3.9 x 2.6" (750 x 98 x 66mm)
Net Weight (lbs/kg)	3.5lbs / 1.6kg



**FSBN25M** 4-zone Soundbar



Max Power	110W
Impedance	4Ω @1kHz 0dB
Effective Frequency Band	Fo- 15kHz
Resonance Frequency	F0=140Hz
Output Sound Pressure Level	>88dB
Product Dimension (W x H x D)	31.9 x 4.9 x 3.9" (80 x 124 x 98.3mm)
Net Weight (lbs/kg)	4.8lbs / 2.2kg



**Description**      **Models**      **Color**

FSB2N25MC	2-zone Soundbar	
-----------	-----------------	--

Visit [www.furrion.com](http://www.furrion.com) for more product detail information.

**FSW8P12-CF** 8" Active Subwoofer



Max Power	120W
Impedance	4Ω @100Hz
Effective Frequency Band	40Hz - 160Hz
Resonance Frequency	40 ± 20%Hz
Output Sound Pressure Level	
Product Dimension (W x H x D)	15.75 x 9.9 x 3.7" (400 x 250 x 93mm)
Net Weight (lbs/kg)	8.8lbs / 4kg



**FMS5L2A** 5" Two-way Outdoor Marine Speaker with LED + LED Ring



Max Power	30W
Impedance	4Ω @1kHz 1V
Effective Frequency Band	Fo-20kHz
Resonance Frequency	120 ± 20%Hz
Output Sound Pressure Level	83 ± 3dB

\*Mount Sold Separately



**FMS5B** 5" Outdoor Marine Speaker



Max Power	30W
Impedance	4Ω @1kHz 1V
Effective Frequency Band	Fo-18kHz
Resonance Frequency	85 ± 20%Hz
Output Sound Pressure Level	88 ± 3dB
Product Dimension (W x H x D)	6 x 6 x 2.1" (152 x 152 x 53.5mm)
Net Weight (lbs/kg)	0.74lbs / 0.34kg











Feature Product



Furrion LIT™

# Portable Bluetooth Speaker.

Capable of delivering up to 15 hours of clear and crisp sound, the portable Furrion LIT™ Bluetooth speaker allows you to stylishly play music on the go. The rugged and waterproof design makes it the perfect speaker for you to take to the beach or pool and can be submersible up to 3.2 ft/1m under water for up to 30 minutes. The Furrion LIT™ is also equipped with a flashlight and can give off SOS signals in an emergency situation. Choose from a range of accessories from Furrion's interchangeable eco-system designed specifically for our products.

- 
EXPLOSIVE DIGITAL SOUND PROCESSOR
- 
SANDPROOF
- 
PLAYTIME (15hrs)\*
- 
WIRELESS DOCK 3hrs  
USB 5hrs #
- 
SHOCKPROOF
- 
WATERPROOF & SUBMERSIBLE  
UP TO 3.2ft/1m for 30min
- 
FLASHLIGHT
- 
EMERGENCY SOS LIGHT & SIREN



Mounting kits for all kinds of adventures.



Distortion free sound with 2 powerful speakers with optimized bass.



Waterproof, IPX7 rated up to 3.2ft for 30 mins.

\*For LIT™ Speaker (FBS012N-PS/BL)

FBS012N-BL/PS Furrion LIT™ Bluetooth Speaker

FURRION LIT™



Rated Power	10W x 2RMS
Battery	1800mAh x 2
Signal To Noise Ratio	≥ 500 dB
Playtime	Up to 15 hours*
Flashlight	≥ 500 lumens
Waterproof	IPX7
Bluetooth	✓
NFC	✓
Speaker Phone	✓
Micro USB Input	✓
USB Charging Out	✓
SOS Light Effect	✓
Product Dimension (W x H x D)	2.9 x 1.4 x 7.7" (73.7 x 47.5 x 194.5mm)
Net Weight (lbs/kg)	1.4lbs / 0.6kg



ACCESSORIES



FBS012NCU  
WIRELESS CHARGING DOCK

	FBS012NCU
Input	DC 9-16V
USB Output	✓
USB Socket 1	1A (Optimized for iPhone®)
USB Socket 2	1A (Optimized for Android™)
12V Output PINS	Up to 1A
Operation Temperature Range	-14°F to 122°F / -10°C to 50°C



FBS012NBS  
RAIL/BIKE MOUNT



FBS012NSM  
STRAP MOUNT



FBS012NHS  
HAND STRAP

BUNDLES



**FBS012NVP-BL  
Adventure Pack**

- Portable Bluetooth Speaker (Black)
- Rail/Bike Mount
- Strap Mount
- Hand Strap



**FBS012NVP-PS  
Adventure Pack**

- Portable Bluetooth Speaker (White)
- Rail/Bike Mount
- Strap Mount
- Hand Strap



**FBS012NAP  
Accessories Pack**

- Rail/Bike Mount
- Strap Mount
- Hand Strap

\*Features and specifications that do not affect product performance are subject to change without notice

# Feature Product



## Furrion Vision S™

# Vehicle Observation System.

Furrion Vision S™ Vehicle Observation Systems are easy to install in a RV, commercial truck or trailer. Monitors are available in 3 sizes with side, rear cameras and doorway security options. All cameras offer a wide viewing angle and night vision while the motion detector and auto-wake function adds extra security when the vehicle is stationary. Furrion Vision S™ Vehicle Observation Systems are wireless and feature a high-speed chip-set which provides real-time high definition viewing up to 24fps. The 2.4GHz wireless connection digitally locks the cameras to the display (up to 50ft) to prevent interference and lagging even at high speeds.



### Monitor

- 4.3" / 5" / 7" DISPLAY OPTIONS
- DIGITAL WIRELESS 2.4GHZ
- TOUCH SCREEN\*
- ANTI-GLARE
- REAR ASSIST MARKER LINES
- DISPLAY UP TO 4 CAMERAS\*
- SECURITY CAMERA AUTO-WAKE
- AUDIO

### Side Camera with Marker Light (left & right)

- 65° WIDE VIEWING ANGLE
- INFRARED NIGHT VISION
- CAMERA RESOLUTION 720x480
- INTELLIGENT NIGHT VISION FILTER
- MOTION DETECT
- WATERPROOF IP65
- BLIND SPOT TURN SIGNAL
- OPTIONAL BUILT-IN RUNNING LIGHT

### Doorway Security / Rear Camera with Marker Light

- 120° WIDE VIEWING ANGLE
- INFRARED NIGHT VISION
- CAMERA RESOLUTION 720x480
- INTELLIGENT IR CUT FILTER
- MOTION DETECT
- WATERPROOF IP65
- MICROPHONE

\*Vision S Side Cameras with Marker Lights for 5" or 7" Display



FCN48TASF Vision S™ Doorway Security / Rear Camera

FURRION VISION S



Night Vision	<16ft (5m)
CMOS Size	1/3"
Optical Lens	F2.0
IR Cut Filter	850nm Automatic
View Angle	120°
Current (IR On)	<400mA@12V
Current (IR Off)	<250mA@12V
Camera Pixel	720 x 480
Waterproof	IP65
Product Dimension (W x H x D)	6.6 x 3.1 x 2.6" / (168.1 x 78 x 64.8mm)

FCN48TASK Vision S™ Rear Camera with Marker Light

FURRION VISION S



Night Vision	<16ft (5m)
CMOS Size	1/3"
Optical Lens	F2.0
IR Cut Filter	850nm Automatic
View Angle	120°
Current (IR On)	<400mA@12V
Current (IR Off)	<250mA@12V
Camera Pixel	720 x 480
Waterproof	IP65
Product Dimension (W x H x D)	7.3 x 2.1 x 1.8" / (184 x 53.7 x 44.1mm)

FCE48TASH Vision S™ Side Camera with LED Marker Light (Left and Right) For 5" and 7" Monitor

FURRION VISION S



Night Vision	<39ft (12m)
CMOS Size	1/3"
Optical Lens	F2.5
IR Cut Filter	850nm Automatic
View Angle	65°
Current (IR On)	<500mA@12V
Current (IR Off)	<250mA@12V
Camera Pixel	720 x 480
Waterproof	IP65
Marker Light	LED
Product Dimension (W x H x D)	5.8 x 3.2 x 1.4" / (144.7 x 81.5 x 34.8mm)

Furrion Vision S™ Kits



- FOS07TAPM**  
**Vision S™ 7" 4-Camera System with Marker Lights**
- 7" Monitor
  - Doorway Security / Rear Camera
  - Rear Camera With Marker Light
  - Side Camera with Marker Light (Left and Right)
  - Windshield Mount and Table Stand



- FOS07TAEM**  
**Vision S™ 7" 3-Camera System with Marker Lights**
- 7" Monitor
  - Rear Camera With Marker Light
  - Side Camera with Marker Light (Left and Right)
  - Windshield Mount and Table Stand



- FOS07TASF**  
**Vision S™ 7" Monitor with Rear Camera**
- 7" Monitor
  - Doorway Security / Rear Camera
  - Windshield Mount and Table Stand



- FOS07TASM**  
**Vision S™ 7" Monitor with Rear Marker Light Camera**
- 7" Monitor
  - Rear Camera With Marker Light
  - Windshield Mount and Table Stand



- FOS05TAEM**  
**Vision S™ 5" 3-Camera System with Marker Lights**
- 5" Monitor
  - Rear Camera with Marker Light
  - Side Camera with Marker Light (Left and Right)
  - Windshield Mount and Table Stand



- FOS05TASF**  
**Vision S™ 5" Monitor with Rear Camera**
- 5" Monitor
  - Doorway Security / Rear Camera
  - Windshield Mount and Table Stand



- FOS05TASM**  
**Vision S™ 5" Monitor with Rear Marker Light Camera**
- 5" Monitor
  - Rear Camera With Marker Light
  - Windshield Mount and Table Stand



- FOS43TASF**  
**Vision S™ 4.3" Single Camera System**
- 4.3" Monitor
  - Doorway Security / Rear Camera
  - Windshield Mount



- FOS43TASM**  
**Vision S™ 4.3" Single Camera System with Marker Light**
- 4.3" Monitor
  - Rear Camera With Marker Light
  - Windshield Mount

ACCESSORIES



C-FOS07TAPK-005

2.4GHz Antenna  
for Camera

ACCESSORIES



F2BC001XXBK

7-way Vision S Camera  
System Adapter



F2BC002XXBK

Camera System 7-Way  
Adapter with Power Switch

# Feature Product



## Furrion Access™

# TV/Radio/VHF/UHF/LTE/Wi-Fi All-In-One Antenna.

Furrion Access™ is a result of our desire to explore new destinations while staying connected. With its omni-directional technology, the antenna is capable of receiving 360-degree signal and enhancing signals to deliver boosted Wi-Fi, HDTV and radio signals. When Wi-Fi isn't available, the dual 4G LTE receivers ensure fast and secured wireless internet everywhere\*. Our Signalsmart™ technology is a high-gain noise filter that removes the interference that causes static and instability in the product ecosystem, delivering powerful connectivity to equipment efficiently.

-  VIBRATIONSMART™
-  CLIMATESMART™
-  360° SIGNAL RECEPTION
-  UV RESISTANT
-  WATERPROOF IP65
-  HD TV COMPATIBLE
-  DUAL 4G ANTENNAS OPTIMIZE RECEPTION
-  LIGHTWEIGHT (only 2.6 lbs)
-  AERODYNAMIC DESIGN
-  DOUBLE THE SIGNAL STRENGTH
-  AM & FM SIGNAL



All-in-one antenna with AM / FM radio, HD TV and high speed internet.



Fast and secure LTE connectivity with antenna, providing up to 150 MBPS download speed.



Automatic 4G / Wi-Fi selection with router, securing the best connection available for up to 32 devices.

\* Data plans can be purchased separately.

FAN73B7C Omni-directional Rooftop Antenna



	AM/FM	LTE/Wi-Fi	TV
Frequency Range	AM: 520 - 1,710kHz / FM: 88 - 108MHz	698 - 2,700MHz	UHF: 470 - 700MHz / FM/VHF: 47 - 230MHz
Frequency Band	AM / FM	LTE / Wi-Fi / 4G	UHF / FM / VHF
Antenna Gain	15dB Max	4dBi Max	UHF: 28dB Max / FM/VHF: 20dB / 24dB Max
Max Output Level	106dBμV		UHF: 105dBμV / FM/VHF: 106dBμV
Impedance	75ohm	50ohm	75ohm
Noise	<7dB		UHF: <6dB / FM/VHF: <7dB
Product Dimension (W x H x D)	28.8 x 8.1 x 10.3" (730 x 205.4 x 260mm)		

FAN17B83 LTE Wi-Fi Router



Supported System	Wi-Fi(LAN): 802.11b/g/n/ac Wi-Fi(Ext.): 802.11b/g/n LTE: B2/B4/B13
Wi-Fi Booster Range	>400ft with >10Mbps throughput
Antenna Gain	Internal LAN Wi-Fi: 1dBi
Antenna Port Impedance	50Ω
Power Rating	Typical: 12V @500mA. Peak 1A
Operation Temperature	-4°F to 140°F / -20°C to 60°C
Product Dimension (W x H x D)	6.7 x 6.6 x 1.3" (169 x 168.2 x 22.9mm)
Net Weight (lbs/kg)	0.3 lbs / 0.7kg

FAN17B87 LTE Wi-Fi Router Unlocked New



Supported System	Wi-Fi (LAN): 802.11b/g/n/ac LTE: B2/B4/B5/B12/B13/B14/B66/B71 UMTS: B2/B4/B5
Wi-Fi Booster Range	>400ft with >10Mbps throughput
Sim interface Type	Nano Sim (4FF)
Network options	Unlocked choice of Verizon / AT&T / T-mobile / Rogers / Telus / Bell
Antenna Gain	Internal LAN Wi-Fi: 1dBi
Antenna Port Impedance	50Ω
Power Rating	Typical: 12V @ 500mA, Peak 1A
Operation Temperature	-4°F to 140°F / -20°C to 60°C
Product Dimension (W x H x D)	6.7 x 6.6 x 1.3" (169 x 168.2 x 22.9mm)
Net Weight (lbs/kg)	0.3 lbs / 0.7kg

\* Data plans can be purchased separately.



## Appliances

### Cooking

#### Ranges

46-49

#### Cooktops

50-53

#### Ovens

54-57

#### Microwaves

58-59

#### Grills

60-63

### Refrigeration

#### Refrigerators

64-73

### Comfort

#### Air Conditioning

74-79

#### Electric Fireplaces

80-83

#### Water Heater

84-87



## Where Precision Meets Style.

Upgrade your cooking experience with appliances designed to complement any kitchen environment. Modern design, ease of use and high performance ensure all your culinary needs are met – whether you're living life on the move, or in your dream home.

## A Finish for Every Kitchen Design.

Midnight Glass, Stainless Steel and Black Steel finishes add a personal touch to your kitchen environment. Whether your kitchen is classic and timeless, or sleek and modern, Furrion appliances offer a finish to match.

### Midnight Glass.

Sleek and contemporary, reflecting bold design.



### Stainless Steel.

Versatile and classic, designed to match a variety of kitchen styles.



### Black Steel.

Bold and modern, adding a touch of luxury.












# Feature Product



Furrion Signature™

## RV Gas Range.

Discover the convenience and ease of cooking with Furrion's 2-in-1 Range Oven. Featuring a thermal radiator burner to improve heat distribution for more even cooking, a glass cover, cavity lighting, LED knobs and broiler function, this oven has all you need to create professional-quality meals without installing multiple appliances. Luxurious black or stainless steel design options complement any décor, while removable grates make cleaning simple.

-  CLIMATESMART™
-  PROFILE OPTIONS
-  CAVITY LIGHTING
-  BROILER FUNCTION
-  FLUSH MOUNTED
-  VIBRATIONSMART™
-  GLASS COVER
-  LED KNOBS
-  IMPROVED HEAT DISTRIBUTION



Foldable glass cover prevents splashes for easy cleaning even in small spaces.



Storage Drawer Front for OEM to custom made storage drawer.



Interactive LED knob indicates operation and gives a sleek and modern design.



F1S17L02A-BL/SS  
F1S17L03A-BL

17" 3-Burner Direct Flame Gas Oven Range



Rear Right Burner	6,500BTU	● ●
Front Burner	9,000BTU	
Rear Left Burner	6,500BTU	
Oven Burner	7,100BTU	
Cavity Light	12V DC	
Ignition	Electrical	
Aluminium Steel Coating	✓	
Gas Safety Cut Off Valve	✓	
Triple Layer Glass Door	✓	
Splashguard	✓	
Glass Cover	2 pcs Folding Cover	
Product Dimension (W x H x D)	21.5 x 16 x 21.6" (546.1 x 406.4 x 549.3mm)	


F1S21L02A-BL/SS  
F1S21L03A-BL

21" 3-Burner Direct Flame Gas Oven Range



Rear Right Burner	6,500BTU	● ●
Front Burner	9,000BTU	
Rear Left Burner	6,500BTU	
Oven Burner	7,100BTU	
Cavity Light	12V DC	
Ignition	Electrical	
Aluminium Steel Coating	✓	
Gas Safety Cut Off Valve	✓	
Triple Layer Glass Door	✓	
Splashguard	✓	
Glass Cover	2 pcs Folding Cover	
Product Dimension (W x H x D)	21.5 x 20 x 21.6" (546.1 x 508 x 549.3mm)	

Accessories



C-FSRE21A-002  
Cooktop Grate

- Die-cast Grates
- Compatible with S17WB4A-BL/SS & FGHWCLDA-BL/SS



CF1SL02ABLA1 / CF1SL02ASSA1  
Drawer Front



C-F1S17L02A-002 / C-FSRE21SA-003  
Top-tray Module








# Feature Product



## Furrion Chef Collection™

# Built-in Gas Cooktop.

The RV chef collection cooktop delivers perfect, consistent heat. The beautiful flush-mount design, professional cast-iron grills and griddle option will redefine the way you use your RV kitchen. Residential 3-burner layout with dual 7500BTU side burners and middle 7500BTU flex burner gives you the diversity that will inspire you to take on any recipe.

-  CLIMATESMART™
-  VIBRATIONSMART™
-  7500 7500 BTU
-  3 GAS BURNERS
-  GAS SAFETY CUT-OFF VALVE
-  PULSE IGNITION
-  CAST IRON GRATE



3 Burner layout with electric ignition.



7500 BTU output cooking performance.



Cast iron grills ensure easy use of all your favorite pots and pans.

FGH4ZSA-SS Chef Collection Gas Cooktop



Pulse Ignition	1.5 V DC	<input type="radio"/>
Gas Type	Propane	
Grate Type	Cast Iron	
Burner Capacity	7,500BTU For Each Burner	
Number of Gas Burners	3	
Sealed Burners	✓	
Gas Safety Cut-off Valve	✓	
Product Dimension (W x H x D)	24.4 x 15 x 4.1" (619.8 x 381 x 83.8mm)	

FGHWCLDA-BL/SS Rangenop Cooktop



Electrical Input	12V DC	<input type="radio"/>
Gas Type	Propane	
Grate Type	Wired Grate	
Burner No.1	6,500BTU	
Burner No.2	8,000BTU	
Burner No.3	6,500BTU	
Pulse Ignition	✓	
LED Knobs	✓	
Gas Safety Cut-off Valve	✓	
Glass Cover	✓	
Product Compatibility	Solo, or With Range Hood	
Product Dimension (W x H x D)	24.4 x 15 x 2.6" (619.8 x 381 x 63.5mm)	

FIH2ZEA-BG Built-in Double Induction Cooktop



Function	Power, Temp, Timer, Lock	Kitchen Timer	1 - 180 mins	<input type="radio"/>
Voltage	120V AC	Automatic Shut-off	✓	
Temp. Level	10	Child Lock	✓	
Power Cable Location	Rear Center	Residual Heat	✓	
Total Connection Load	1,800W	Pan Sensor	✓	
Power Source	Electric	Power Management System	✓	
Cooktop Surface Type	Electronic Glass Touch	Product Dimension (W x H x D)	24.4 x 15 x 2.6" (619.8 x 381 x 63.5mm)	
Control Location	Front			

# Feature Product



## Furrion Chef Collection™

# Built-In Electric Oven.

The RV chef collection built-in oven is a perfect blend of precision, performance, safety and style.

- VIBRATIONSMART™
- CLIMATESMART™
- OVEN CAPACITY
- UP TO 24HRS
- 150-475°F TEMP. SETTING
- AUTO PAN DETECTION
- TEMPERATURE CONTROL
- AUTO SAFETY SHUT-OFF
- CHILDLOCK



2.0cu. ft. oven with large capacity cooks everything from pizza, to your holiday roast.



Oval shape burner and broil functions make cooking your favorite meal simple.



Advanced safety features ensure ease of use and peace of mind.

FS22N20A-SS/BL Chef Collection Gas Oven



Voltage	12VDC	Pulse Ignition	✓	● ●
Heat Input	9,000BTU (Gas)	Cooling Fan	✓	
Oven Capacity	2 cu. ft.	Cavity Light	✓	
Timer	Manual up to 23 hours 59 minutes	Gas Safety Cut Off Valve	✓	
Product Dimension (W x H x D)	24.8 x 22.2 x 25.9" (628 x 562 x 656mm)	Triple Layer Glass Door	✓	



FG21MA1EA-BG Chef Collection Gas Oven



Voltage	12V DC	Pulse Ignition	✓	●
Heat Input	9,000BTU (Gas)	Cooling Fan	✓	
Oven Capacity	2 cu. ft.	Cavity Light	✓	
Timer	Manual up to 23 hours 59 minutes	Gas Safety Cut Off Valve	✓	
Product Dimension (W x H x D)	29 x 26.38 x 25.13" (736 x 669 x 637mm)	Triple Layer Glass Door	✓	



FTRD22LA-SS/SB Chef Collection Electric Oven



Voltage	120V AC	Pulse Ignition	✓	● ●
Electric Input	120V 1,400W	Cooling Fan	✓	
Oven Capacity	2 cu. ft.	Cavity Light	✓	
Timer	Digital up to 23 hours 59 minutes	LED Digital Temperature Display	✓	
Product Dimension (W x H x D)	24.8 x 22.2 x 21" (628 x 562 x 532mm)	Gas Safety Cut Off Valve	✓	
		Triple Layer Glass Door	✓	



**FMCM15-BL** 1.5 cu. ft. Over-the-Range Convection Microwave Oven



Oven Capacity	1.5 cu. ft.	Power Source	120V / 60Hz	●
Rated Output Power (Microwave)	900W	Rated Output Power (Convection)	1,450W	
Rated Input Power (Microwave)	1,500W	Power Level	10	
Display type	LED	MW Type	Ø 13.6" Glass Turntable	
Door Opening Type	Handle	Child Lock	✓	
Max. Cooking Time	99'99"	Auto Cook	✓	
Product Dimension (W x H x D)	29.9 x 15.8 x 15" (759 x 419.1 x 381mm)	Reminder End Signal	✓	

**FMSMA16-SS** 1.6 cu. ft. Over-the-Range Microwave Oven



Oven Capacity	1.6 cu. ft.	Power Source	120V / 60Hz	●
Rated Output Power (Microwave)	1,000W	Power Level	10	
Rated Input Power (Microwave)	1,500W	MW Type	Ø 13.6" Glass Turntable	
Display type	LED	Auto Cook	✓	
Door Opening Type	Handle	Reminder End Signal	✓	
Max. Cooking Time	99'99"			
Product Dimension (W x H x D)	29.9 x 15.8 x 15" (759 x 429 x 464.1mm)			

**FMCM15-SS-A** 1.5 cu. ft. OTR Convection Microwave Oven



Oven Capacity	1.5 cu. ft.	Power Source	120V / 60Hz	●
Rated Output Power (Microwave)	900W	Power Level	10	
Rated Input Power (Microwave)	1,500W	MW Type	Ø 13.6" Glass Turntable	
Display type	Green LED	Control Panel	✓	
Door Opening Type	Handle	Safety Lock	✓	
Max. Cooking Time	-	Recirculation Mode	✓	
Product Dimension (W x H x D)	33.3 x 20.1 x 19.3" (845 x 510 x 490mm)			

**FMSN09-BL** 0.9 cu. ft. Solo Microwave Oven



Oven Capacity	0.9 cu. ft.	Power Source	120V / 60Hz	●
Rated Output Power (Microwave)	900W	Power Level	10	
Rated Input Power (Microwave)	1,350W	MW Type	Ø 13.6" Glass Turntable	
Display type	LED	Child Lock	✓	
Door Opening Type	Button	Auto Cook	✓	
Max. Cooking Time	99'99"	Reminder End Signal	✓	
Product Dimension (W x H x D)	19.1 x 14.1 x 15.9" (483 x 356 x 402mm)			



FMSM09-SS-TK  
Silver plastic trim kit



FMSM09-BL-TK  
Black plastic trim kit  
FMSM09-SB-TK  
Black VCM plastic trim kit

**FMSM13-BL** 1.3 cu. ft. OTR Convection Microwave Oven



Capacity	1.3 cu.ft.	Filter	2 x AL carbon filter	●
Wattage	1500W	Product Dimension (W x H x D)	23.9 x 16.7 x 17.5" (607 x 424 x 444mm)	
Display	Blue LED	Net Weight (lbs/kg)	50.7lbs / 23kg	
Display dimension	2.2 x 1.1" (56 x 27mm)			
Cooking power	10 level			
Door	Side open			
Control	Touch panel			
CFM	300CFM, 2 speed vent			
Rangehood feature	High / Low (microwave mode) High / Low / Off (Standby mode)			
Cavity	Powder coating			
Light	2 x light bulbs			
Turntable	12.8"			

\*Features and specifications that do not affect product performance are subject to change without notice.



Grill

## RV Drop-in Grill.

High output grill for the outdoor RV kitchen. This product is made out of Stainless steel for weather resistance, is easy to clean and easily installed. The innovative design allows the grill to remain securely attached while driving your RV while the splashguard acts as both a lid, a windshield, and a warming rack.



WEATHERPROOF



HIGH POWER GRILL



STAINLESS STEEL GREASE TRAY



EVEN COOKING



STAINLESS STEEL GRATE



PIEZO IGNITION



WARMING RACK



Easy to install in your RV outdoor kitchen or BBQ slide-out.




Durable construction and weather-resistant stainless steel withstands all outdoor weather.



Industry leading powerful 10,000 BTU output makes cooking your favorite outdoor meals a breeze.

FGL202A-SS

21" Single Burner Drop-in Grill with Splash Guard

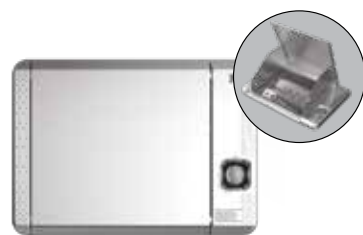

Ignition Type	Piezo
Fuel Type	Propane
Burner Output	10,000 BTU
Installation Type	Drop-in
Grates Material	Stainless Steel 304
Warming Rack	✓
Grease Tray	✓
Splash Guard	✓
Product Dimension (W x H x D)	21.2 x 7.4 x 15.1" (538 x 187.3 x 383mm)













# Feature Product



Furrion Arctic®

## 10 cu. ft. 12V Built-In Refrigerator.

With its sleek and innovative design, the 10 cu. ft. Furrion Arctic® 12V Built-In Refrigerator is built to keep food fresher for longer as you head off on your off-grid adventure. A stunning addition to any RV and the perfect companion.

-  POWERFUL COOLING
-  LARGE CAPACITY
-  VIBRATIONSMART™
-  BUILT-IN
-  LOCK SYSTEM
-  CLOSED-LOOP
-  OFF-GRID MODE
-  CHARCOAL FILTER



Powerful deep freeze performance in a large storage space to store cold foods like ice cream without worrying about them melting.



Advanced Compressor technology avoids the inherent safety risks associated with absorption gas refrigeration, including fire hazards, gas leaks, and explosions.



Closed loop air flow design eliminates the heat from the cabinet enclosure for greater efficiency.

FCR08DCGTA-BL 8 cu. ft. 12V Built-in Refrigerator(Right Hinge)  
 FCR08DCGTA-BR 8 cu. ft. 12V Built-in Refrigerator(Left Hinge)



Capacity	8 cu. ft.	<input type="radio"/>	<input checked="" type="radio"/>
Power Consumption	0.998 kWh / day		
Voltage	12V DC		
Defrosting	Manual		
Refrigerant	R134a		
Adjustable Thermostat	✓		
Reversible Door	✓		
Low Vibration and Low Noise	✓		
Adjustable Feet	✓		
Auto Light	✓		
Optional Door Insert Panel	Sold Separately		
Product Dimension (W x H x D)	24.3 x 53.2 x 25.8" (616 x 1350 x 654mm)		

FCR10DCGTA-BL 10 cu. ft. 12V Built-in Refrigerator(Right Hinge)  
 FCR10DCGTA-BR 10 cu. ft. 12V Built-in Refrigerator(Left Hinge)



Capacity	10 cu. ft.	<input type="radio"/>	<input checked="" type="radio"/>
Power Consumption	1.02 kWh / day		
Voltage	12V DC		
Defrosting	Manual		
Refrigerant	R134a		
Adjustable Thermostat	✓		
Reversible Door	✓		
Low Vibration and Low Noise	✓		
Adjustable Feet	✓		
Auto Light	✓		
Optional Door Insert Panel	Sold Separately		
Product Dimension (W x H x D)	24.3 x 60.2 x 25.8" (616 x 1528 x 654mm)		

Panels available in:



Matte Black  
 C-FCR08DCDTA-A02  
 C-FCR10DCDTA-A02



High Gloss Black  
 C-FCR08DCGTA-A03a  
 C-FCR10DCGTA-A03a



Stainless Steel  
 C-FCR08DCGTA-A01  
 C-FCR10DCGTA-A01











# Feature Product



## Furrion Chef Collection™


# 14 cu. ft. 4-Door Built-in Refrigerator.

Built with durable and reliable compressor technology, this four-door refrigerator design offers flexible layout options and is optimized for home, yacht and vehicle use. It features a wine cellar compartment with wood interior and an easy-view glass door.

-  VIBRATIONSMART™
-  CLIMATESMART™
-  AUTO LIGHT FUNCTION
-  MULTI-AIRFLOW SYSTEM
-  POWER SAVING
-  DOOR-LATCHING SYSTEM
-  ADJUSTABLE THERMOSTAT
-  WINE CELLAR COMPARTMENT
-  QUIET OPERATION
-  FAST FREEZE
-  BUILT-IN
-  COMPATIBLE WITH FURRIION INVERTER



Powerful cooling performance packed in a sleek and modern design.

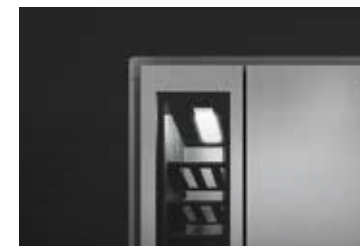

Separated cooling zone with an integrated Wine Cooler to better preserve your favorite food and beverages.



Closed loop air flow design eliminates the heat from the cabinet enclosure for greater efficiency.

# Feature Product

## Refrigerators

# 15.6 and 20.6 cu. ft. Side by Side Refrigerator.

With four sleek finishes, and 2 generous sizes, this Side by Side Refrigerator is designed to complement your personal style. Keep food fresher for longer, and preserve better with Super Freeze, whilst consuming less power with eco-friendly technology.

-  INVERTER COMPRESSOR
-  SUPER FREEZER
-  ECO-FRIENDLY
-  RECESSED HANDLE
-  LED DIGITAL DISPLAY
-  COUNTER DEPTH
-  SPILL PROOF SHELVES
-  DOOR OPEN ALARM
-  LOW ENERGY CONSUMPTION MODE
-  COMPATIBLE WITH FURRIION INVERTER



Designed for built-in cabinetry, allowing seamless integration into your kitchen design.



Preserve food better with a Super Freeze function that allows freezing up to -7.6° F.



Recessed door handles improve ergonomics and give a sleek design.

### Available in:

Stainless Steel



Black Gloss



FCR14ACBQA-SS/BL

14 cu. ft. 4-Door Built-in Refrigerator



Capacity	14 cu. ft.	Wine Compartment	✓	
Power Consumption	1.268 kWh/day	Individual Temperature	✓	
Frequency	60Hz	Vibration Resistance And Low Noise	✓	
Voltage	AC 115V	Adjustable Feet	✓	
Defrosting	Non-frost	Auto Light	✓	
Refrigerant	R134a	Door open alarm	✓	
Product Dimension (W x H x D)	37.3 x 78.6 x 25.8" (945 x 1995 x 655mm)			

FCR15ACATA-VS

14.5 cu. ft. Top Freezer Refrigerator



Total Capacity	15 cu. ft.	Refrigerant	R600a
Freezer Capacity	3.5 cu. ft.	Rated Voltage	AC 115V/60Hz
Fresh Food Compartment	11 cu. ft.	Power consumption	325 kWh/year
Door Type	Double door with top mounted	Storage Temp Range	
Handle	Recessed Handle	(Refrigerator Compartment)	1 to 9°C, adjustable
Control Type	Electronic Control	(Small Freezer)	≤-17.8°F, adjustable
Front Door Panel	VCM Stainless Steel with Metal Brushed	Working Temp Range	34°C to 48°C
Storage Compartments	Refrigerator compartment and freezer compartment	Defrost	Automatic
No. of Shelves	3	Certification	UL, DOE
No. of Crisper	1	Product Dimension (W x H x D)	27.56 x 66.14 x 27.56" (700 x 1680 x 700mm)
Cooling Type	Compression cooling system	Net weight (lbs/kg)	149.9/68

FCR16ACASA-BG/SS

15.6 cu. ft. Side by Side Refrigerator



Total Capacity	15.6 cu. ft. (442L)	Power consumption	460kWh/year	
Freezer Capacity	6.08 cu. ft. (172L)	Storage Temp Range		
Fresh Food Compartment	9.54 cu. ft. (270L)	(Refrigerator Compartment)	32 to 42.8°F (0 to 6°C) adjustable	
Door Type	Side by Side	(Small Freezer)	-9.4 to 3.2°F (-23 to -16°C) adjustable	
Handle	Recessed Handle	Working Temp Range	61°F to 110°F (16°C to 43°C)	
Control Type	LED Display with electronic control	Defrost	Automatic	
Front Door Panel	VCM Stainless Steel/Black Gloss/ Black	Certification	CSA, DOE	
No. of Shelves	16	Product Dimension (W x H x D)	32.88 x 70.13 x 25" (836 x 1780 x 636mm)	
No. of Crisper	4	Net weight (lbs/kg)	187 / 85	
Cooling Type	Compression cooling system			
Refrigerant	R600a			
Rated Voltage	AC 115V/60Hz			

FCR21ACASA-BG/SV

20.6 cu. ft. Side by Side Refrigerator



Total Capacity	20.6 cu. ft. (585L)	Power consumption	500kWh/year	
Freezer Capacity	7.4 cu. ft. (210L)	Storage Temp Range		
Fresh Food Compartment	13.2 cu. ft. (375L)	(Refrigerator Compartment)	32 to 42.8°F (0 to 6°C) adjustable	
Door Type	Side by Side	(Small Freezer)	-9.4 to 5°F (-23 to -15°C) adjustable	
Handle	Recessed Handle	Working Temp Range	50 to 110°F (10°C to 43°C)	
Control Type	LED Display with electronic control	Defrost	Automatic	
Front Door Panel	VCM Stainless Steel/Black Gloss/ Black	Certification	CSA, DOE	
No. of Shelves	16	Product Dimension (W x H x D)	35.75 x 70.12 x 27.75" (911 x 1780 x 706mm)	
No. of Crisper	4	Net weight (lbs/kg)	190 / 86	
Cooling Type	Compression cooling system			
Refrigerant	R600a			
Rated Voltage	AC 115V/60Hz			

# Feature Product



## Furrion Chill™

# RV Rooftop Air Conditioner.

The Furrion Chill™ mid-profile rooftop air conditioning comes in 14.5K BTU and 15.5K BTU capacity models, all available in contemporary black or white finishes to accommodate all RV sizes and finishes. Offering superior cooling performance, the Furrion Chill™ utilizes dual fan technology to operate up to 25% more efficiently (EER) compared to competitive leading single-fan models. It cools down your RV faster and reduces ambient noise for enhanced comfort. Advanced features such as "Sleep mode" ensure your comfort needs are always answered regardless of the weather conditions. Conversion kits are available to upgrade your existing air conditioning system to the Furrion Chill™.

-  HIGH COOLING CAPACITY
-  ENERGY EFFICIENT
-  EASY TO INSTALL
-  LIGHT WEIGHT
-  AERODYNAMIC DESIGN
-  MID PROFILE
-  ULTRA QUIET
-  VIBRATIONSMART™
-  CLIMATESMART™
-  UV RESISTANT



Mid-profile aerodynamic design for reduced air resistance and optimized efficiency.



Vibrationsmart™ technology reduces compressor vibration for ultra-quiet operation.



Climatesmart™ technology uses lightweight EPP foam housing to make cooling more efficient.

FACR14SA-PS/BL  
FACR15SA-PS/BL

Furrion Chill™ Rooftop Air Conditioner

**FURRION CHILL™**



Capacity	3,760W
Energy Efficiency Ratio	2.19
Set Temperature Range	60°F to 86°F (16°C to 30°C)
Outdoor Sound Pressure Level	80dB
IP Rating	IP24
Refrigerant	R410a
Volts/Frequency/Phase	115V / 60Hz / 1Ph
Cooling Amps	15.4
Product Dimension (W x H x D)	34.8 x 27.6 x 13.6" / (884 x 700 x 345mm)

Description	Model	Capacity	Energy Efficiency Ratio	Cooling Amps	Color
Furrion CHILL™ 14.5K Rooftop Air Conditioner	FACR14SA-PS/BL	3450W	2.13	14.6	<input checked="" type="radio"/> <input type="radio"/>
Furrion CHILL™ 15.5K Rooftop Air Conditioner	FACR15SA-PS/BL	3760W	2.19	15.4	<input checked="" type="radio"/> <input type="radio"/>

FACT11MA-PS

Furrion Chill™ Air Distribution Box With Manual Control

**FURRION CHILL™**



Temperature Control	8 Positions	<input type="radio"/>
Detachable Filter	<input checked="" type="checkbox"/>	
Two Way Air Outlet	<input checked="" type="checkbox"/>	
Indoor Sound Pressure Level	60dB	
Input Power	115V AC	
Frequency	60Hz	
Compressor & Condenser Fan	115V AC / 20A	
3 Evaporator Fan Motor Relay	115V AC / 5A	
Temperature Range	64 °F to 86°F (18°C to 30°C)	
Fan Control	3 Positions	
Product Dimension (W x H x D)	19.7 x 13.6 x 19.7" / (500 x 242.6 x 500mm)	

FACT11CA-PS

Furrion Chill™ Standard Air Distribution Box with Manual Control

**FURRION CHILL™**



Mechanical Control	8 Positions	<input type="radio"/>
Fast Cool	<input checked="" type="checkbox"/>	
Voltage	AC 115V	
Frequency for AC	60Hz (AC)	
Compatible with:	Rooftop AC Unit Heat Strip	
Product Dimension (W x H x D)	17.25 x 4.43 x 17.25" / (438 x 112.5 x 438mm)	

FACT12LA-PS

Furrion Chill™ Air Distribution Box With LED Light

**FURRION CHILL™**



LED Light	7 Colors	<input type="radio"/>
Detachable Filter	<input checked="" type="checkbox"/>	
Two Way Air Outlet	<input checked="" type="checkbox"/>	
Indoor Sound Pressure Level	60dB	
Input Power	115V AC / 12V DC	
Frequency	60Hz	
Compressor & Condenser Fan	115V AC / 20A	
3 Evaporator Fan Motor Relay	115V AC / 5A	
Temperature Range	60°F to 86°F (16°C to 30°C)	
Product Dimension (W x H x D)	19.7 x 13.6 x 19.7" / (500 x 242.6 x 500mm)	

FACT12SA-PS

Furrion Chill™ Air Distribution Box

**FURRION CHILL™**



Detachable Filter	<input checked="" type="checkbox"/>	<input type="radio"/>
Two Way Air Outlet	<input checked="" type="checkbox"/>	
Indoor Sound Pressure Level	60dB	
Input Power	115V AC / 12V DC	
Frequency	60Hz	
Compressor & Condenser Fan	115V AC / 20A	
3 Evaporator Fan Motor Relay	115V AC / 5A	
Temperature Range	60°F to 86°F (16°C to 30°C)	
Product Dimension (W x H x D)	19.7 x 13.6 x 19.7" / (500 x 242.6 x 500mm)	

FACT12CA-PS

Furrion Chill™ Standard Air Distribution Box for Electric Thermostat

**FURRION CHILL™**



Fast Cool	<input checked="" type="checkbox"/>	<input type="radio"/>
Voltage	AC 115V	
Frequency for AC	60Hz (AC)	
Operating Temperature Range	60°F to 86°F/16°C to 30°C	
Compatible with:	Rooftop AC Unit Heat Strip	
Product Dimension (W x H x D)	17.25 x 4.40 x 17.25" / (438 x 112.5 x 438mm)	

ACCESSORIES


**FURRION CHILL™**



C-FACR15SA-A01


Universal Conversion kit  
with wiring harness

FACW10SA-BL Furrion Chill™ Single Zone Basic Wall Thermostat




Power Supply	12V DC	Communication Port	✓
Operation Buttons	4	2 Fan Speeds	✓
Temperature Range	60°F to 86°F (16°C to 30°C)	Memory Function	✓
		Auto Fan Speed	✓
Zone Control	1	Auto Reset	✓
Product Dimension (Dia x D)	Ø 3 x 0.9" (Ø 75 x 22.5mm)		

FACW12SA-BL Furrion Chill™ Single Zone Basic Wall Thermostat




Power Supply	12V DC	Communication Port	✓
Operation Buttons	4	3 Fan Speeds	✓
Temperature Range	60°F to 86°F (16°C to 30°C)	Memory Function	✓
		Auto Fan Speed	✓
Zone Control	1	Auto Reset	✓
Product Dimension (Dia x D)	Ø 3 x 0.9" (Ø 75 x 22.5mm)		

FACW12PA-BL Furrion Chill Single Zone Premium Wall Thermostat



Power Supply	12V DC	Communication Port	✓
Operation Buttons	6	3 Fan Speeds	✓
Temperature Range	60°F to 86°F (16°C to 30°C)	Memory Function	✓
		Auto Fan Speed	✓
Program Timers	—	Auto Reset	✓
Zone Control	1	LED Mood Light	✓
Product Dimension (Dia x D)	Ø 3 x 0.9" (Ø 75 x 22.5mm)		


FACW12ZA-BL Furrion Chill™ Multi Zone Wall Thermostat



Power Supply	12V DC	Communication Port	✓
Operation Buttons	9	3 Fan Speeds	✓
Temperature Range	61°F to 86°F (16.1°C to 30°C)	Memory Function	✓
		Auto Fan Speed	✓
Program Timers	2	Auto Reset	✓
Zone Control	4	LED Mood Light	✓
Product Dimension (Dia x D)	Ø 4.4 x 0.9" (Ø 111.3 x 22.6mm)		


\*Features and specifications that do not affect product performance are subject to change without notice.

FACC12SA-BL Furrion Chill™ Single Zone Controller  
FACC12ZA-BL Furrion Chill™ Multi Zone Controller

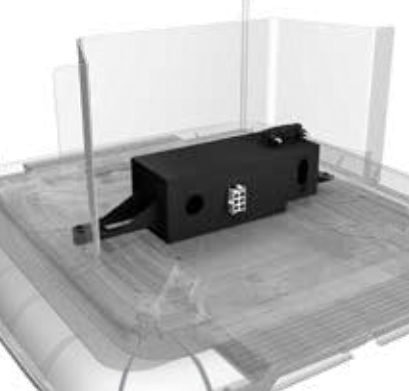


Input Power	115V AC / 12V DC	
Frequency	60Hz	
Compressor & Condenser Fan	115V AC / 20A	
3 Evaporator Fan Motor Relay	115V AC / 5A	
Temperature Range	60°F to 86°F (16°C to 30°C)	
	<b>Single Zone Controller</b>	<b>Multi Zone Controller</b>
3 Fan Speeds	✓	✓
Auto Fan Speed	✓	✓
Memory Function	✓	✓
Auto Restart	✓	✓
LED Mood Light	✓	✓
Sleep Function	✓	✓
2 Program Timer	—	✓
Zone Control	—	✓

FACC10SA-BL Furrion Chill™ Single Zone Controller




Input Power	115V AC / 12V DC	
Frequency	60Hz	
Compressor & Condenser Fan	115V AC / 20A	
3 Evaporator Fan Motor Relay	115V AC / 5A	
Temperature Range	60°F to 86°F (16°C to 30°C)	
	<b>Single Zone Controller</b>	
2 Fan Speeds	✓	
Auto Fan Speed	✓	
Memory Function	✓	
Auto Restart	✓	

FACC12BA-BL Furrion Chill™ Single Zone Controller Compatible with BMPRO Controllers



Input Power	115V AC / 12V DC	
Frequency	60Hz	
Compressor & Condenser Fan	115V AC / 20A	
3 Evaporator Fan Motor Relay	115V AC / 5A	
Temperature Range	60°F to 86°F (16°C to 30°C)	
	<b>Single Zone Controller</b>	
2 Fan Speeds	✓	
Auto Fan Speed	✓	
Memory Function	✓	
Auto Restart	✓	

C-FACR15SA-A02 / C-FACR15SA-A04 Heat Strip



Heating Capacity	1,500W
Operation Ambient Temperature	19°F to 86°F (-7°C to 30°C)
Volts/Hertz	115V/60Hz
Power Watts:	1,500W
Power Cord Gauge:	AWG 14 (1.6mm <sup>2</sup> )
Product Dimension (W x H x D)	17.81 x 3.87 x 0.93" (452 x 98 x 23.5)
Mechanical control	C-FACR15SA-A02
Electronic control	C-FACR15SA-A04









# Feature Product



## Fireplaces

# 30" Built-In Electric Crystal Fireplace with Wall Mount.

Create the perfect ambience wherever you are. Our superior 30" stainless steel fireplaces combine elegance and functionality in one, offering modern, luxurious design and robust heating capabilities. Consistent heat control makes it easy to find the perfect temperature, with a safety cut-off that intuitively and automatically switches power off to prevent overheating. Designed with innovative four-level LED flame technology, the simulated crystal design creates a beautiful, warm and cozy environment.


-  WORKS WITH UNIMOTE
-  OVERHEATING SAFETY CUT-OFF
-  TEMPERATURE CONTROL SETTINGS
-  HEAT UP TO 500 SQ.FT
-  CRYSTAL WITH 4-LEVEL LED FLAME TECHNOLOGY
-  TIMER



Consistent heat control makes it easy to heat up to a 500 sq.ft room.




Works with Furrion Unimote™ to allow control of various functions, such as temperature and LED flame color.

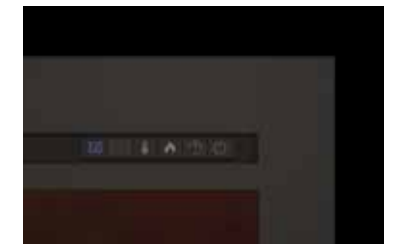


Engineered with advanced safety features, such as a safety cut-off that intuitively and automatically switches power off to prevent overheating.

**FF48SW15A-BL** 48" Built-In Electric Wood Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange			
Product Dimension (W x H x D)	48.1" x 17.8 x 6.3" / (1220 x 450 x 158mm)			

**FF48SC15A-BL** 48" Built-In Electric Crystal Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange, Blue, Red			
Product Dimension (W x H x D)	48.1 x 17.8 x 6.25" / (1220 x 450 x 158mm)			

**FF40SW15A-BL** 40" Built-In Electric Wood Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange			
Product Dimension (W x H x D)	39.4 x 17.8 x 6.3" / (1001 x 450 x 158mm)			

**FF40SC15A-BL** 40" Built-In Electric Crystal Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange, Blue, Red			
Product Dimension (W x H x D)	39.4 x 17.8 x 6.3" / (1001 x 450 x 158mm)			

**FF34SW15A-BL** 34" Built-In Electric Wood Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1500W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange			
Product Dimension (W x H x D)	33.875 x 17.75 x 6.25" / (860 x 450 x 158mm)			

**FF34SC15A-BL** 34" Built-In Electric Crystal Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange, Blue, Red			
Product Dimension (W x H x D)	33.9 x 17.8 x 6.3" / (860 x 450 x 158mm)			

**FF30SW15A-BL/SS** 30" Built-In Electric Wood Fireplace with Wall Mount




Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange			
Product Dimension (W x H x D)	30 x 17.8 x 6.3" / (762 x 450 x 158mm)			

**FF30SC15A-BL/SS** 30" Built-In Electric Crystal Fireplace with Wall Mount



Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1465W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange, Blue, Red			
Product Dimension (W x H x D)	30 x 17.8 x 6.3" / (762 x 450 x 158mm)			

**FF26C15A-BL** 26" Fireplace Curved Glass with Wood Flame



Rated Voltage	120V AC 60Hz	LED Control Board	✓	●
Heating Output	750W / 1400W	Timer	✓	
Remote Type	IR	Log Fuel Effect	✓	
Flame Effect	Orange			
Product Dimension (W x H x D)	27.3 x 21.3 x 8.5" / (693 x 540 x 215mm)			

# Feature Product



## Water Heater

# Tankless Gas Water Heater.

Engineered with Furrion's latest technology including smart electronic ignition with a lock-out safety function and an intelligent flow meter to reduce the risk of scalding.

- HOT WATER CAPACITY
- CONSISTENT TEMPERATURE
- ELECTRONIC IGNITION
- OVER TEMP. PROTECTION
- AUTO TURN OFF
- BLOWER BLOCK PROTECTION
- WALL CONTROLLER
- LOW PRESSURE ALARM
- PRESSURE RELIEF VALVE



Mixing Valve with vortex technology to reduce temperature fluctuations and scalding.



Advanced safety features including a pressure relief valve, over temperature protection, blower block protection and automatic shut off.



Wall controller allows easy and convenient temperature control.

FWH09-PS-AM

2.4GPM Tankless Water Heater



Retrofit door for 2.4GPM Tankless Water Heater



1.FWH09EA-PS



2.FWH41EA-PS



3.FWH46EA-PS

Input	60,000 BTU / hr
Gas Supply	Propane
Max. Water Inlet Pressure	65PSI (4.5bar)
Power Supply	DC 12V
Standard Water Outlet Temp.	95-124°F (35-51°C)
Max. Setting Temperature	124°F (51°C)
Temperature Sensor	9.77kΩ
Hot Water Capacity	2.4 Gallons Hot Water Per Minute
Gas Inlet Pressure	11" W.C - 14" W.C
Relief Valve Release Pressure	87PSI (6bar)
Power Input	< 3A
Over Temperature Protection	✓ 135°F (75°C) last 3s will stop running)
Automatic Ignition	✓
Exhaust Blocking Protection	✓
Product Dimension (W x H x D)	<b>1.</b> 16 1/8 x 16 1/8 x 17/32" (410 x 410 x 17mm) <b>2.</b> 16 1/8 x 18 1/8 x 17/32" (410 x 460 x 17mm) <b>3.</b> 18 1/8 x 18 1/8 x 17/32" (460 x 460 x 17mm)





## Energy

### Energy

**Solar Panel**  
92-97

### Power Distribution

**AC/DC Power Centers**  
98

**Inverters & Converters**  
99

**Cordsets & Adapters**  
100-105

**Power Inlets**  
106-107

**Connectors & Adapters**  
108-109



# Energy for Off-Grid Living.

Created for off-grid lifestyles, Furrion energy ecosystems offer the ability to power your home, RV or yacht. Enjoy the conveniences of luxury living, wherever your next adventure takes you.

# Feature Product




## Solar Panel


# 100W Portable Solar Panel.

Power your adventures with efficient and lightweight monocrystalline panels engineered to provide stable and reliable power in varying weather conditions. Providing up to 100W of total rated output, the IP65-rated panels withstand hail, rain, dust, high winds and snow. Built-in bypass diodes ensure excellent performance in low-light.

- 100W RATED POWER
- WATERPROOF
- ALUMINIUM FRAME WITH CORNER PROTECTION
- HANDLE FOR EASY MOBILITY
- CARRYING CASE INCLUDED
- 12' LEAD CABLE
- OPTIMAL PERFORMANCE UNDER LOW LIGHT ENVIRONMENT
- WITHSTANDS HAIL AND SNOW LOADS
- ADJUSTABLE KICKSTAND
- INCLUDE FURRIION 10A PWM CHARGER (IP65)\*
- FURRIION PV CONNECTORS

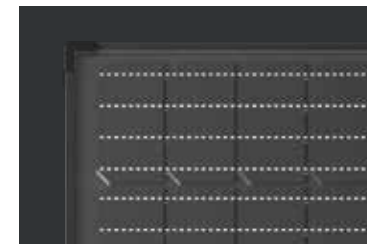

Monocrystalline cell technology improves energy efficiency.

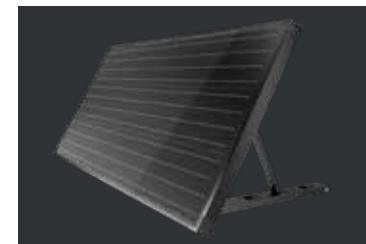

Kickstand and lightweight, portable design ensure easy and convenient use, in whatever weather you encounter.



Furrion ePod™ Power Station is compatible with Furrion 100W portable solar panel.

## FSPK10MWT-BK

## 100W Kickstand Solar Panel with 10A PWM Controller



Max. Power (Pmax)	100W
Rated Current (Imp)	5.18A
Short Circuit Current (Isc)	5.59A
Rated Voltage (Vmpp)	19.3V
Open Circuit Voltage (Voc)	23.8V
Max. System Voltage	600V
Solar Cell Type	Monocrystalline
Furrion 10A PWM Controller	✓
Carrying Case	✓
Solar Port Output Type	DC barrel connector 5.5 x 2.5mm
Compatible with	Furrion Solar Port and DC barrel connector 6.5 X 3.0mm
Test Condition	77 °F (25 °C), 1,000W/m <sup>2</sup> , Irradiance and AM=1.5
Product Dimension (W x H x D)	43.3 x 20.2 x 1.4" (1100 x 514 x 35mm)

## FSFP16MW-BL

## 165W Rigid Solar Panel



Max. Power (Pmax)	165W
Rated Voltage (Vmpp)	18.72V
Rated Current (Imp)	8.82A
Open Circuit Voltage (Voc)	23.12V
Short Circuit Current (Isc)	9.49A
Max. System Voltage	600V
Solar Port Output Type	Furrion Connectors
Output Lead Length	3'
Pre Drilled Frame For Secure Mounting	✓
Compatible with Furrion Z-mount brackets (C-FSFP16MW-A02)	✓
Solar Cell Type	Monocrystalline
Product Dimension (W x H x D)	26.6 x 59.1 x 1.4" (675 x 1500 x 35mm)

## Rigid Solar Panel Accessories

C-FSFP16MW-A02	Furrion Z-Mount Brackets
C-FSPP20MW-A05	12' Furrion Solar Panel Extension Cables

## FSEB30JWL-BL

## Rooftop Solar Panel Connection Kit



Material of Housing	UV Resistant Plastic
Current	30-50 Amp
Connectivity	Furrion Connector Pair, IP65
Cable Gauge of Termination on Contactor Side	12 AWG PV Cable
Cable Gauge of Termination on Box Side	10 to 14 AWG Electrical Cable
Operating Temperature	40°F to 176°F (-40°C to 80°C)
IP Rating	IP65
Product Dimension (W x H x D)	6.9 x 4.9 x 1.5" (174 x 124 x 37mm)



## FSFP50MAT- BL

## 50W Solar Panel Battery Maintainer

**Solar panel:**

Max. Power (Pmax)	50W
Rated Voltage (Vmpp)	18.5V
Rated Current (Impp)	2.7A
Open Circuit Voltage (Voc)	22.6V
Short Circuit Current (Isc)	6A
Max. System Voltage	600V
Solar Cell Type	Monocrystalline
Cell Efficiency	18%
Product Dimension (W x H x D)	5.1 x 1.75 x 3.75" (810 x 57 x 570 mm)

**PWN Controller:**

Charging Current	10A
Overvoltage Protection	17V
Floating Charging Voltage	13.8V
Boost Charging Recovery Voltage	13.2V
Undervoltage	12.0V
Over-Discharge Voltage	11.0V
Cable	16AWG, 235/8" (600mm)

## FSFP10MAT- BL

## 100W Solar Panel Battery Maintainer

**Solar panel:**

Max. Power (Pmax)	100W
Rated Voltage (Vmpp)	18V
Rated Current (Impp)	5.5A
Open Circuit Voltage (Voc)	21.4V
Short Circuit Current (Isc)	5.8A
Max. System Voltage	600V
Solar Cell Type	Monocrystalline
Cell Efficiency	19%
Product Dimension (W x H x D)	5.1 x 1.75 x 3.75" (810 x 57 x 570 mm)

**PWN Controller:**

Charging Current	10A
Overvoltage Protection	17V
Floating Charging Voltage	13.8V
Boost Charging Recovery Voltage	13.2V
Undervoltage	12.0V
Over-Discharge Voltage	11.0V
Cable	16AWG, 235/8" (600mm)

**FCVSWC42A** 35A All-in-One Power Center



Stand By Voltage	13.2V	Auto Battery Type Selection	✓	●
Operation Voltage Range	105-132V AC 60Hz	Output Over Voltage Protection	✓	
Full Load Input Power	615W	AC Low Voltage Protection	✓	
Efficiency (LiFePO4) (120Vac)	>80%	Intelligent Fan Speed Control	✓	
Reverse Polarity Protection	By Fuse	Electronic Current Limiting	✓	
Charge Current	35A	Full Load Input Current (12V/60Hz)	7A	
Product Dimension (W x H x D)	11.9 x 8.4 x 6.6" (300.9 x 211.3 x 167.9mm)			

**FCVSWC54A** All-in-One Power Center



Stand By Voltage	3.2V	Auto Battery Type Selection	✓	●
Operation Voltage Range	105-132V AC 60Hz	Output Over Voltage Protection	✓	
Full Load Input Power	790W	AC Low Voltage Protection	✓	
Efficiency (LiFePO4) (120Vac)	>80%	Intelligent Fan Speed Control	✓	
Reverse Polarity Protection	By Fuse	Electronic Current Limiting	✓	
Charge Current	45A	Full Load Input Current (12V/60Hz)	8.8A	
Product Dimension (W x H x D)	11.87 x 3.37 x 6.62" (300.9 x 211.3 x 167.9mm)			

**FSCC30PWB-BL** 25A Wall Mount MPPT Solar Charge Controller with Mounting Bracket



Nominal System Voltage	12/24V DC	LED Indicator	✓	●
Max. PV Power (Pmax)	300W	Auto Battery Type Detection	✓	
Max. PV Open Circuit Voltage (Voc)	16 to 70V DC	Over Charging Protection	✓	
MPPT Tracking Efficiency	≥99%	Over Temperature Protection	✓	
Min. Battery Voltage For Charging	8V/20V	Auto Temperature Compensation	✓	
Max. MPPT Charging Current	25A			
Max. Charging Efficiency	> 90%			
Product Dimension (W x H x D)	7.8 x 8.37 x 2.68" (200 x 212 x 68mm)			

**FSCC60PW-BL** 50A Wall Mount MPPT Solar Charge Controller  
**FSCC60PWB-BL** 50A Wall Mount MPPT Solar Charge Controller with Mounting Bracket



Nominal System Voltage	12/24V DC	LED Indicator	✓	●
Max. PV Power (Pmax)	600W	Auto Battery Type Detection	✓	
Max. PV Open Circuit Voltage (Voc)	16 to 135V DC	Over Charging Protection	✓	
MPPT Tracking Efficiency	≥99%	Over Temperature Protection	✓	
Min. Battery Voltage For Charging	3V DC	Auto Temperature Compensation	✓	
Max. MPPT Charging Current	50A			
Max. Charging Efficiency	> 90%			
Product Dimension (W x H x D)	7.8 x 10.37 x 2.68" (200 x 262 x 68mm)			

**FDP12WA-BL** AC/DC Wall Mount Distribution Panel



System Voltage	Input 120Vac 30Amp/ 240Vac 50Amp.	DC Terminal bar	Built-in negative battery terminal	●
AC Distribution	Max. 12 branches (7 for 30A main; 12 For 50A main)	Fuse Status Indicator LED	No light: Working fuse Red light: Broken fuse	
AC Main Breakers	30Amp or 50Amp x2	Certification	UL67 and FCC Part 15B	
AC Receptacle	5-20R 120V 20A receptacle	Larger Door Assembly	13.88 x 11.75"	
DC Circuits (Total)	15DC outputs (30Amp x2CH, 20Amp x13CH)	Dimensions (W x H x D)	352.5 x 298.45mm	
Rough Opening Dimensions (W x H x D)	12.44 x 8.44 x 3" (315.9 x 214.4 x 76.2mm)			

**FCVSDC60A** 60A Power Converter



Stand By Voltage	13.2V	Intelligent Fan Speed Control	✓	●
Output Over Current Protection	65A	Cut-off Protection	✓	
No Load Input Current	300mA	DC Lower & Higher Voltage Protection	✓	
Reverse Polarity Protection	By Fuse	Electronic Current Limiting	✓	
Charge Current	60A	Intelligent Thermal De-rating	✓	
Full Load Input Power	1,015W	Efficiency (LiFePO4)(120Vac)	>80%	
Operation Voltage Range	100-132V AC 60Hz			
Product Dimension (W x H x D)	11.7 x 9.3 x 4.4" (296.3 x 235.6 x 110mm)			

**FCVSDC80A** 80A Power Converter




Stand By Voltage	13.2V	Intelligent Fan Speed Control	✓	●
Output Over Current Protection	85A	Cut-off Protection	✓	
No Load Input Current	200mA	DC Lower & Higher Voltage Protection	✓	
Reverse Polarity Protection	By Fuse	Electronic Current Limiting	✓	
Charge Current	80A	Intelligent Thermal De-rating	✓	
Full Load Input Power	1,500W	Efficiency (LiFePO4)(120Vac)	>80%	
Operation Voltage Range	100-132V AC 60Hz			
Product Dimension (W x H x D)	11.7 x 9.3 x 4.4" (296.3 x 235.6 x 110mm)			

**FIVBD10A** 1000W 12V Pure Sine Wave Inverter




Battery Voltage	10.5 - 15V DC	Low Battery Protection	✓	●
Output Voltage	115 ± 5V AC	Over Voltage Protection	✓	
Output Waveform	Pure Sine Wave	Over Load Protection	✓	
Max. Peak Efficiency	88%	Over Temperature Protection	✓	
Bypass Transfer Time	<20ms	Continuous Rated Power	1,000W	
AC Bypass Input	100-120V AC	Circuit Breaker	15A	
Output Frequency	60±1Hz	Grounding	Terminal Lug	
Surge Rated Power	2,500W			
Product Dimension (W x H x D)	16.8 x 9.3 x 4.4" (425 x 236 x 112mm)			



**Faultsmart™**  
REVERSE POLARITY AND  
NEUTRAL LOSS INDICATION

Furrion's Faultsmart™ neutral loss and reverse polarity indicator includes a bright blue LED power indicator and a bright red LED reverse polarity indicator. This reverse polarity LED indicates incorrect flow of electricity due to incorrect wiring. When this occurs, the current will continue to flow until the circuit burns open. Furrion's Faultsmart™ LED provides the user with an instant warning and reduces the risk of damage to electrical equipment or the likely consequence of an onboard fire.



**Pullsmart™**  
SAFE DISCONNECT

### Smart safety solutions

Revolutionary Pullsmart design helps prevent neutral loss.


Furrion's RV Pullsmart™ safe disconnect feature is a revolutionary design which helps prevent neutral loss due to user error. The plug handle has been designed to provide the user with a quick, easy and safe disconnect from the power source. Neutral loss commonly occurs when the user disconnects the plug on an angle resulting in pulling out the neutral pin before the live pins. This action creates a surge of electricity through the connection that can damage appliances and other electronics. The Pullsmart™ design helps create an optimal pull out angle that can prevent damage to your on board appliances and electronics.



**Powersmart™**  
POWER VOLTAGE INDICATOR

Furrion's Powersmart™ bright blue LED voltage indicator confirms that power is present. In blackout situations, this super bright LED helps determine whether the fault has occurred at the power source or at the equipment.

**Bright Blue LED** Power Voltage Indicator

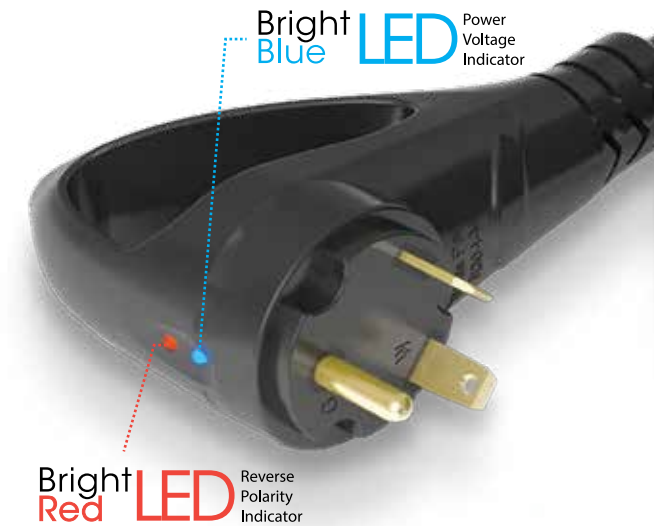

# Cordsets

Furrion cordsets are the perfect balance of strength, durability and flexibility. Constructed to withstand harsh pull tests and flexible enough to coil and store with ease, Powersmart™ and Faultsmart™ technologies provide valuable safety information. These cordsets are made to the highest quality standards for long life, backed by Furrion's 5 year warranty.

Features:

- Furrion's Powersmart™ and/or Faultsmart™ LED indicators
- Plug end has side grips for easy, user friendly connection
- Universal fit with all other brands



**Bright Red LED** Reverse Polarity Indicator

**Bright Blue LED** Power Voltage Indicator



**Bright Blue LED** Power Voltage Indicator



## 50 Amp 125/250V Powersmart™ Cordset

Product Coding and Pin Config.  
Conn. (F) Plug (M)



30ft F50R30-SB (Black)  
36ft F50R36-SB (Black)



## 30 Amp Powersmart™ 125V cordset

Product Coding and Pin Config.  
Conn. (F) Plug (M)



25ft F30P25-SY (Yellow)  
50ft F30P50-SY (Yellow)



## 30 Amp 125V Cordset

Product Coding and Pin Config.  
Conn. (F) Plug (M)



25ft F30C25-SY (Yellow)  
50ft F30C50-SY (Yellow)



## 50 Amp Powersmart™ 125/250V Cordset

Product Coding and Pin Config.  
Conn. (F) Plug (M)




50ft F50250-SY (Yellow)



# Pigtail Adapters

## With Faultsmart™ and Powersmart™ LED Technology

Pigtail adapters allow for connection from a shore power receptacle to an RV or Marine inlet or equipment with dissimilar power configurations. Furrion pigtail adapters are made to high quality standards, constructed with high-grade, corrosion resistant materials for longevity in the harsh environments. Designed for safety, Powersmart™ and Faultsmart™ indicators provide valuable, real-time information. Plug-ends feature ergonomic side grips for easy, user-friendly connection. Furrion adapters meet global industry standards and conform to NEMA universal fit with other brands. Cables are rated up to 600V, 221°F (105°C). Furrion stands behind its shore-power products with a 5-year warranty. 50A adapters include heavy-duty storage bag.

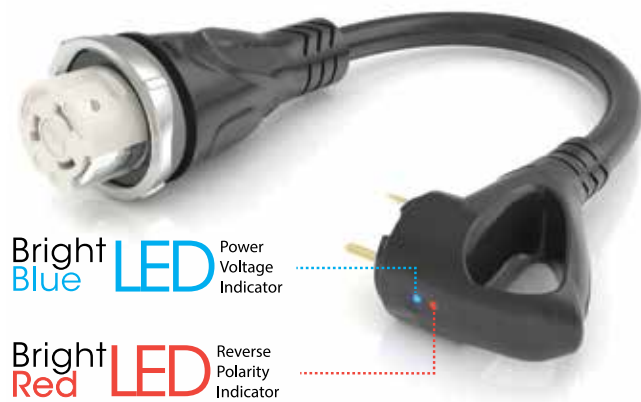

### 30 Amp to 15 Amp Pigtail Adapter with Powersmart™

Conn. (F)	Plug (M)	<b>FP3015-SY (Yellow)</b> 30 Amp Conn. (F) - 15 Amp plug (M)			
		<b>FP3015-SS (Silver)</b> 30 Amp Conn. (F) - 15 Amp plug (M)			

### 50 Amp 125/250V to 30 Amp Pigtail Adapter Powersmart™

Conn. (F)	Plug (M)	<b>FP5530-SY (Yellow)</b> 50 Amp 125/250V Marine Conn. (F) - 30 Amp Marine plug (M)	

# Y-Adapters

## With Powersmart™ LED Technology



Furrion Y-Adapters are engineered for durability in harsh environments and constructed with heavy-duty, corrosion-resistant materials. Designed for safety, the Faultsmart and Powersmart LED fault and voltage indicators provide real time, useful, connection information. With a modern design and sleek appearance, Furrion Y-adapters feature ergonomic, molded side grips to provide the boater with an easy, user-friendly connection. All Furrion Y-Adapters conform to NEMA universal fit with other brands and are rated up to 600V, 221°F (105°C). Furrion stands behind its shore-power products with a 5-year warranty.

### 2 x 30 Amp RV to 30 Amp RV Y-Adapter

Product Coding and Pin Config.	<b>F3030RY-SB (Black)</b> (2) 30 Amp straight blade RV Conn. (F) - 30 Amp RV straight blade plug (M)			
Conn. (F)	Plug (M)			

### 2 x 15 Amp to 30 Amp Y-Adapter

Product Coding and Pin Config.	<b>F1530Y-SY</b> (2) 15 Amp conn (F) - 30 Amp plug (M)		
Conn. (F)	Plug (M)		

### 2 x 50 Amp 125V to 50 Amp 125V Y-Adapter

Product Coding and Pin Config.	<b>F5050Y-SY</b> (2) 50 Amp 125V conn (F) - 50 Amp 125V plug (M)		
Conn. (F)	Plug (M)		

# Inlets


Furrion's shore power inlets are constructed with high quality materials to withstand harsh environments. These stylish, modern inlets feature a Powersmart™ voltage indicator LED to show live connection status.

**Features:**

- Furrion's Powersmart™ LED indicator
- Furrion's sleek, modern design
- Available in polished stainless steel and fiber filled UV polyester materials
- Universal fit for industry standard

**Specifications:**

- Plastic inlet : 316 marine grade stainless steel logo plate
- Outer casing: Fiber filled UV stabilized polyester
- Stainless steel inlet: Hand polished stainless steel outer casing
- Rear and internal parts: Plug Inserts: PC (CTI greater than 600v)
- Rear enclosure: PA - UL flammability rating 94v-0
- Terminals and pins: Nickel plated brass pins for corrosion resistance

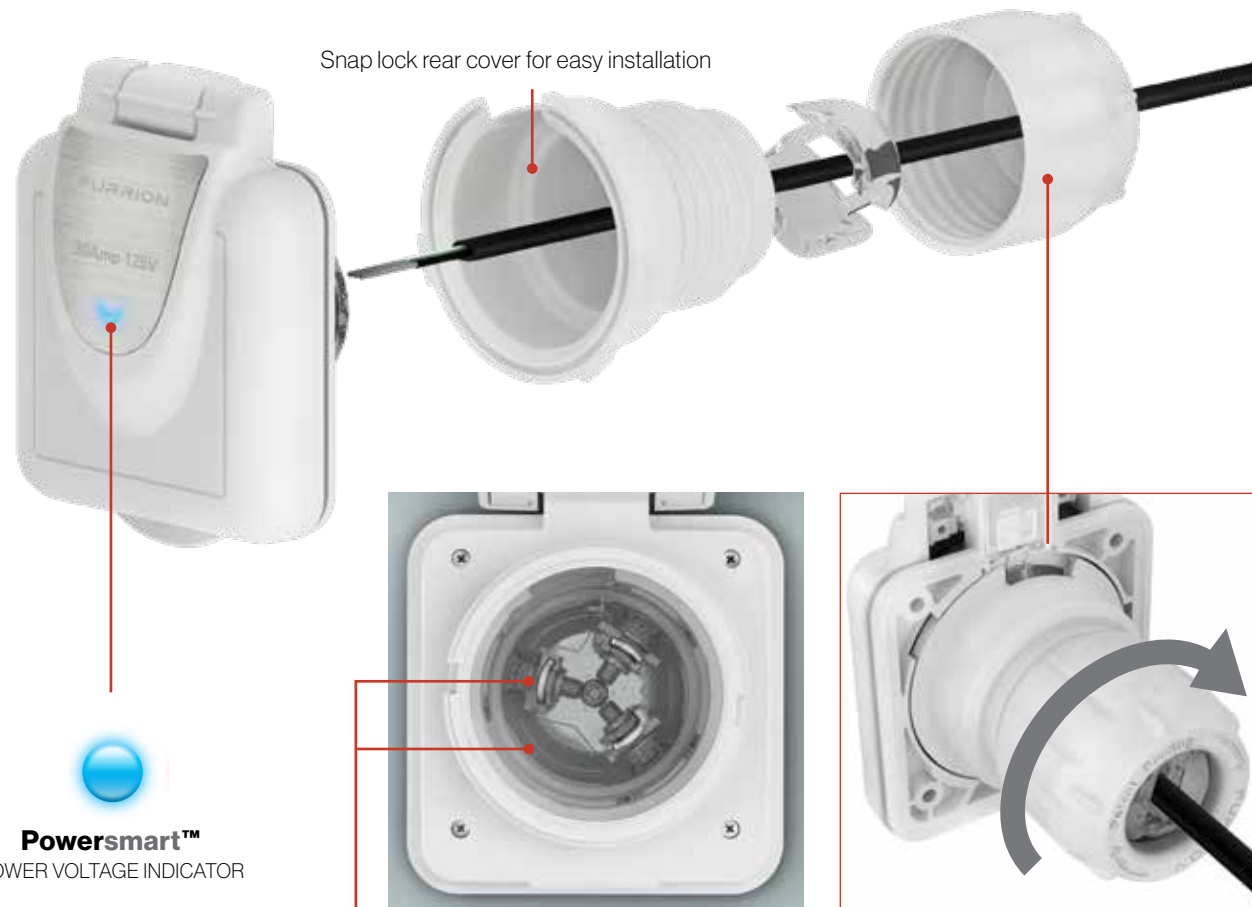


Snap lock rear cover for easy installation



Innovative design provides 50% more thread, securing cable with more torque and reduces the opportunity for cross threading during installation.

Transparent pin face provides the user with quick indication that the cable is secured to the terminal and provides visible warning for overheating connection or internal damage.

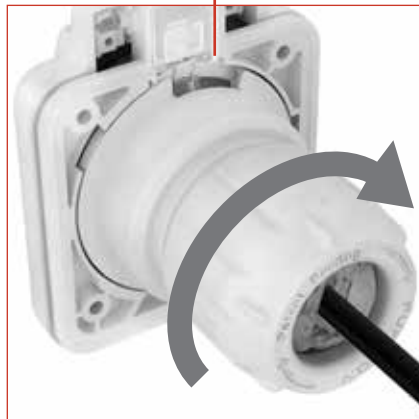

Threaded strain relief makes installation faster and easier while pulling the cable toward the terminals to ensure a safe and secure connection.



**FSPINS-PS / FSPINS-BS**

Solar Port Inlet for RV

Modern and sleek design. Made from heavy duty marine-grade materials with a fiber filled UV stabilized polyester outer casing designed to withstand harsh outdoor environment.

**30A Shore Power Inlet**

Prong Configuration **F30ITS-SS** Stainless Steel



**50A Shore Power Inlet**

Prong Configuration **F50INS-PS** White



**50A 125/250V Shore Power Inlet**

Prong Configuration **F52INS-PS** White



# 12V DC Connections



F12VRSB 12V Dual USB Charger And Receptacle In-one

- USB Charger:
- Voltage rating: 12V DC
  - Max Amp: USB1: 1A/5V, USB2: 2.1A/5V
- Cigarette lighter receptacle:
- Voltage rating: 12V/24V DC
  - Max Amp: 15A



# Cordset Conversion Kits



Convert your hard-wired RV power cordset into an easy-to-use electrical set up. No more struggling with heavy power cords in and out of small access doors!

- Simple and easy installation
- Use your existing cordset
- Easier storage for your cable



FCKIT30-PS 30A RV Power Conversion Kit

- 30A Powersmart™ LED square non-metallic inlet
- 30A female plug
- Titanium color weatherproof plug cover
- Electrical box
- Inlet mounting ring and gaskets



# Generator Adapters

30A to 30A Adapter Plug

Product Coding and Pin Config.  
Conn. (F) Plug (M)



F3030AD-RY



# Plug Covers

50A Female Connection Cover

F50CVL-SY (Yellow)



# Furrion Product List

SKU	Product Name	Furrion ID	Page
FDHK32V1A	32" Furrion Sense® HD LED All-In-One Entertainment System	110115	16
FDHS32M4A	32" HD LED TV	110045	16
FDFS40M4A	40" FHD LED TV	110317	17
FDUS50F1A	50" 4K LED TV	111367	17
FDUS50M7A	50" 4K LED TV	110085	17
DV1230-BL	260W 3-Zone Entertainment System with Independent Zone Control and DVD	110009	20
DV3100S	120W 2-Zone Entertainment System with DVD	110215	20
DV3300S-BL	120W 2-Zone Entertainment System with DVD	110156	21
DV7200	40W 2-Zone Mono Entertainment System	110020	22
FSB24SA2C-BL	40W Passive Soundbar	110188	23
FSBN4W-BL	20W Soundbar Speaker	110218	23
FSBT43S-BL	30W Soundbar Speaker	110186	23
FSB2N25MC-BL	2-zone Soundbar	110217	24
FSBN25M-BL	110W 4-zone Soundbar	110140	24
FSW8P12-CF	8" Active Subwoofer	110299	24
FMS5B	5" Outdoor Marine Speaker	110326	25
FMS5L2A-BL	5" Two-way Outdoor Marine Speaker with LED + LED Ring	110038	25

SKU	Product Name	Furrion ID	Page
FBS012N-BL	Furrion LIT™ Bluetooth Speaker - Black	110160	28
FBS012N-PS	Furrion LIT™ Bluetooth Speaker - White	110250	28
FBS012NBS	Furrion LIT™ Rail/Bike Mount	110205	28
FBS012NCU	Furrion LIT™ Wireless Charging Dock	110161	28
FBS012NHS	Furrion LIT™ Hand Strap	110081	28
FBS012NSM	Furrion LIT™ Strap Mount	110110	28
FBS012NAP	Furrion LIT™ Accessories Pack	110159	29
FBS012NVP-BL	Furrion LIT™ Adventure Pack Black	110070	29
FBS012NVP-PS	Furrion LIT™ Adventure Pack White	110255	29
FCE48TASH	Furrion Vision S™ Side Camera with LED Marker Light (Left and Right)	110469	32
FCN48TASF	Furrion Vision S™ Doorway Security / Rear Camera	110414	32
FCN48TASK	Furrion Vision S™ Rear Camera with Marker Light	110476	32
FOS05TAEM	Furrion Vision S™ 5" 3-Camera System with Marker Lights	110448	33
FOS05TASF	Furrion Vision S™ 5" Monitor with Rear Camera	110449	33
FOS05TASM	Furrion Vision S™ 5" Monitor with Rear Marker Light Camera	110377	33
FOS07TAEM	Furrion Vision S™ 7" 3-Camera System with Marker Lights	110482	33
FOS07TAPM	Furrion Vision S™ 7" 4-Camera System with Marker Lights	110452	33
FOS07TASF	Furrion Vision S™ 7" Monitor with Rear Camera	110379	33
FOS43TASF	Furrion Vision S™ 4.3" Single Camera System	110423	33
FOS43TASM	Furrion Vision S™ 4.3" Single Camera System with Marker Light	110493	33
C-FOS07TAPK-005	2.4GHz Antenna for Camera	21070	34
F2BC001XXBK	7-way Vision S Camera System Adapter	111144	35
F2BC002XXBK	Camera System 7-Way Adapter with Power Switch	111312	35
FAN73B7C	Furrion Access™ Omni-directional Rooftop Antenna	110431	38
FAN17B87	Furrion Access™ LTE Wi-Fi Router Unlocked	111143	39
FAN17B83	Furrion Access™ LTE Wi-Fi Router	110440	39



SKU	Product Name	Furrion ID	Page
F1S17L02A-BL	17" 3-Burner Direct Flame Gas Oven Range - Black	111387	48
F1S17L02A-SS	17" 3-Burner Direct Flame Gas Oven Range - Stainless Steel	111388	48
F1S17L03A-BL	17" 3-Burner Direct Flame Gas Oven Range - Black	111463	48
F1S21L02A-BL	21" 3-Burner Direct Flame Gas Oven Range - Black	111389	48
F1S21L02A-SS	21" 3-Burner Direct Flame Gas Oven Range - Stainless Steel	111465	48
F1S21L03A-BL	21" 3-Burner Direct Flame Gas Oven Range - Black	111464	48
C-FSRE21SA-002	Cooktop Grate	210528	49
C-F1S17L02A-002	17" Top tray module	210984	49
C-FSRE21SA-003	21" Top tray module	210634	49
CF1SL02ABLA1	Drawer Front - Black	111468	49
CF1SL02ASSA1	Drawer Front - Stainless Steel	111469	49
FGH4ZSA-SS	Chef Collection Gas Cooktop	111047	52
FGHWCLDA-BL	Rangetop Cooktop - Black	110873	52
FGHWCLDA-SS	Rangetop Cooktop - Stainless Steel	110913	52
FIH2ZEA-BG	Built-in Double Induction Cooktop	110847	53
FS22N20A-SS	Chef Collection Gas Oven - Stainless Steel	110957	56
FS22N20A-SB	Chef Collection Gas Oven	110857	56
FTRD22LA-BL	Chef Collection Electric Oven - Black	111114	56
FTRD22LA-SS	Chef Collection Electric Oven - Stainless Steel	111137	56
FG21MA1EA-BG	Chef Collection Gas Oven - Black Glass	111462	56
FMCM15-BL	1.5 cu. ft. Over-the-Range Convection Microwave Oven	110848	58
FMSMA16-SS	1.6 cu. ft. Over-the-Range Microwave Oven	111076	58
FMCM15-SS	1.5 cu. ft. OTR Convection Microwave Oven - Stainless Steel	111377	58
FMSM13-BL	1.3 cu. ft. OTR Microwave	111474	59
FMSM09-SS-TK	Silver plastic trim kit	110935	59
FMSM09-BL-TK	Black plastic trim kit	110932	59
FMSM09-SB-TK	Black VCM plastic trim kit	110933	59
FGL202A-SS	21" Single Burner Drop-in Grill with Splash Guard	111129	62
FCR08DCGTA-BL	8 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Right Hinge)	111401	66
FCR08DCGTA-BR	8 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Left Hinge)	111402	66
FCR10DCGTA-BL	10 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Right Hinge)	111403	67
FCR10DCGTA-BR	10 cu. ft. Furrion Arctic® 12V Built-in Refrigerator(Left Hinge)	111404	67
C-FCR08DCDTA-A02	8 cu. ft. Furrion Arctic® Matte Black Door Panel Wood Set (Thickness 4.5mm)	110894	67
C-FCR10DCDTA-A02	10 cu. ft. Furrion Arctic® Matte Black Door Panel Wood Set (Thickness 4.5mm)	111320	67
C-FCR08DCGTA-A03a	8 cu. ft. Furrion Arctic® High Gloss Black Door Panel Set (2mil film) (USA)	111601	67
C-FCR10DCGTA-A03a	10 cu. ft. Furrion Arctic® High Gloss Black Door Panel Set (2mil film) (USA)	111602	67
C-FCR08DCGTA-A01	8 cu. ft. Furrion Arctic® Stainless Steel Door Panel Set (USA)	111391	67
C-FCR10DCGTA-A01	10 cu. ft. Furrion Arctic® Stainless Steel Door Panel Set (USA)	111396	67
FCR14ACBQA-BL	14 cu. ft. 4-Door Built-in Refrigerator - Black	111027	72
FCR14ACBQA-SS	14 cu. ft. 4-Door Built-in Refrigerator - Stainless Steel	111068	72
FCR15ACATA-VS	14.5 cu. ft. Top Freezer Refrigerator	111329	72

SKU	Product Name	Furrion ID	Page
FCR16ACASA-BG	15.6 cu. ft. Side by Side Refrigerator - Black	111594	73
FCR16ACASA-SS	15.6 cu. ft. Side by Side Refrigerator - Stainless Steel	111595	73
FCR21ACASA-BG	20.6 cu. ft. Side by Side Refrigerator - Black	111346	73
FCR21ACASA-SV	20.6 cu. ft. Side by Side Refrigerator - Stainless Steel	111347	73
FACR14SA-BL	14.5K Furrion Chill™ Rooftop Air Conditioner - Black	111117	76
FACR14SA-PS	14.5K Furrion Chill™ Rooftop Air Conditioner - White	110876	76
FACR15SA-BL	15.5K Furrion Chill™ Rooftop Air Conditioner - Black	110898	76
FACR15SA-PS	15.5K Furrion Chill™ Rooftop Air Conditioner - White	110855	76
FACT11MA-PS	Furrion Chill™ Air Distribution Box With Manual Control	110967	76
FACT11CA-PS	Furrion Chill™ Standard Air Distribution Box with Manual Control	111406	76
FACT12CA-PS	Furrion Chill™ Standard Air Distribution Box for Electric Thermostat	111405	77
FACT12LA-PS	Furrion Chill™ Air Distribution Box With LED Light	111043	77
FACT12SA-PS	Furrion Chill™ Air Distribution Box	111051	77
C-FACR15SA-A01	Universal Conversion kit with wiring harness	110822	77
FACW10SA-BL	Furrion Chill™ Single Zone Basic Wall Thermostat	111476	78
FACW12SA-BL	Furrion Chill™ Single Zone Basic Wall Thermostat	110900	78
FACW12PA-BL	Furrion Chill™ Single Zone Premium Wall Thermostat	110899	78
FACW12ZA-BL	Furrion Chill™ Multi Zone Wall Thermostat	110829	78
FACC10SA-BL	Furrion Chill™ Single Zone Controller	111475	79
FACC12BA-BL	Furrion Chill™ Single Zone Controller Compatible with BMPRO Controllers	111480	79
FACC12SA-BL	Furrion Chill™ Single Zone Controller	111039	79
FACC12ZA-BL	Furrion Chill™ Multi Zone Controller	111116	79
C-FACR15SA-A02	Furrion Chill™ Heat Strip - Mechanical	111471	79
C-FACR15SA-A04	Furrion Chill™ Heat Strip - Electronic	111479	79
FF30SW15A-BL	30" Built-In Electric Wood Fireplace with Wall Mount - Black	110872	82
FF30SW15A-SS	30" Built-In Electric Wood Fireplace with Wall Mount - Stainless Steel	111124	82
FF34SW15A-BL	34" Built-In Electric Wood Fireplace with Wall Mount	110910	82
FF40SW15A-BL	40" Built-In Electric Wood Fireplace with Wall Mount	111044	82
FF48SW15A-BL	48" Built-In Electric Wood Fireplace with Wall Mount	110842	82
FF26C15A-BL	26" Fireplace Curved Glass with Wood Flame	111079	82
FF30SC15A-BL	30" Built-In Electric Crystal Fireplace with Wall Mount - Black	110970	83
FF30SC15A-SS	30" Built-In Electric Crystal Fireplace with Wall Mount - Stainless Steel	110838	83
FF34SC15A-BL	34" Built-In Electric Crystal Fireplace with Wall Mount	111091	83
FF40SC15A-BL	40" Built-In Electric Crystal Fireplace	111012	83
FF48SC15A-BL	48" Built-In Electric Crystal Fireplace with Wall Mount	111099	83
FWH09A-PS-AM	Water Heater	110882	86
FWH09EA-PS	Water Heater Small Door	111081	86
FWH41EA-PS	Water Heater Medium Door	110997	86
FWH46EA-PS	Water Heater Large Door	111111	86

SKU	Product Name	Furrion ID	Page
FSPK10MWT-BL	100W Kickstand Solar Panel with 10A PWM Controller	110650	94
FSFP16MW-BL	165W Rigid Solar Panel	110743	94
C-FSFP16MW-A02	Furrion Z-Mount Brackets	110530	94
C-FSPP20MW-A05	12' Furrion Solar Panel Extension Cables	110531	94
FSEB30JWL-BL	Rooftop Solar Panel Connection Kit	110714	95
FSFP50MAT-BL	50W Solar Panel Battery Maintainer	110686	96
FSFP10MAT-BL	100W Solar Panel Battery Maintainer	111219	97
FCVSWC42A	35A All-in-One Power Center	110532	98
FCVSWC54A	All-in-One Power Center	110725	98
FSCC30PWB-BL	25A Wall Mount MPPT Solar Charge Controller with Mounting Bracket	110784	98
FSCC60PW-BL	50A Wall Mount MPPT Solar Charge Controller	110645	98
FSCC60PWB-BL	50A Wall Mount MPPT Solar Charge Controller with Mounting Bracket	110706	98
FCVSDC60A	60A Power Converter	110719	99
FCVSDC80A	80A Power Converter	110581	99
FDP12WA-BL	AC/DC Wall Mount Distribution Panel	110699	99
FIVBDP10A	1000W 12V Pure Sine Wave Inverter	110643	99
F50R30-SB-OEM	50 Amp 125/250V Powersmart™ Cordset	110676	102
F50R36-SB-OEM	36 ft. 50 Amp 125/250V Powersmart™ Cordset	110758	102
F30C25-SY-AM	25 ft. 30 Amp 125V Cordset	110554	103
F30C50-SY-AM	30 Amp 125V Cordset	110669	103
F30P25-SY-AM	25 ft. 30 Amp Powersmart™ 125V cordset	110538	103
F30P50-SY-AM	30 Amp Powersmart™ 125V cordset	110663	103

SKU	Product Name	Furrion ID	Page
FP3015-SS	30 Amp to 15 Amp Pigtail Adapter with Powersmart™	110639	104
FP3015-SY	30 Amp to 15 Amp Pigtail Adapter with Powersmart™	110763	104
FP5530-SY	50 Amp 125/250V to 30 Amp Pigtail Adapter Powersmart™	110761	104
F1530Y-SY	(2) 15 Amp conn (F) - 30 Amp plug (M)	110599	105
F3030RY-SB	(2) 30 Amp straight blade RV Conn. (F) - 30 Amp RV straight blade plug (M)	110609	105
F5050Y-SY	(2) 50 Amp 125V conn (F) - 50 Amp 125V plug (M)	110618	105
F30ITS-SS	30A Shore Power Inlet	110578	107
F50INS-PS-AM	50A Shore Power Inlet	110704	107
F52INS-PS-AM	50A 125/250V Shore Power Inlet	110553	107
FSPINS-BS-AM	Solar Port Inlet for RV	110597	107
FSPINS-PS-AM	Solar Port Inlet for RV	110689	107
F12VRSB-B	12V Dual USB Charger And Receptacle In-one	110520	108
FCKIT30-PS	30A RV Power Conversion Kit	110635	108
F3030AD-RY	30A to 30A Adapter Plug	110574	109
F50CVL-SY	50A Female Connection Cover	110583	109

©2007-2021 Furrion Ltd. Furrion, the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Furrion Ltd. is under license. Other trademarks and trade names are those of their respective owners. The N-Mark is a trademark or registered trademark of NFC Forum, Inc. in the United States and in other countries.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.